
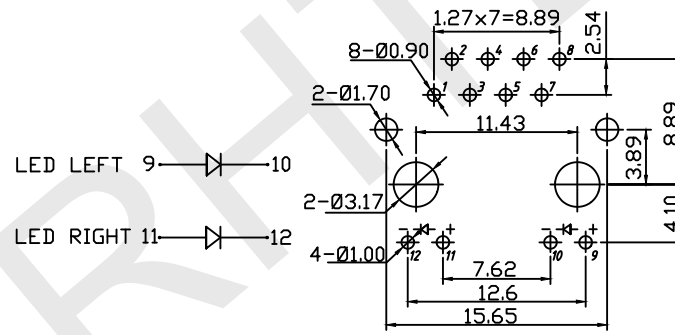


Material:  
 Housing: PBT+Glass Filled Polyester  
 Flammability Rating : UL 94 V-0  
 Contacts: Phosphor Bronze  $\varnothing 0.46\text{mm}$   
 Plating: Gold Plating  
 Shield: Brass, Tin Plating

Electrical:  
 Voltage Rating: 125VAC  
 Current Rating: 1.5A  
 Contact Resistance:  $30\text{m}\Omega$  Max.  
 Insulation Resistance:  $500\text{M}\Omega$  Min.  
 Dielectric Strength:  $1000\text{VAC Rms}$  50Hz, 1 Min.  
 Durability: 600 cycles Min.  
 Operation Temperature:  $-40^{\circ}\text{C}$  to  $+70^{\circ}\text{C}$



PCB Layout

Order Information

RHTLY09B-8P8C-W - G/Y-XX

Contacts: 8P8C  
 Shield: W-with Shield  
 LED Code: LEFT/RIGHT  
 G/Y-Green/Yellow  
 Y/G-Yellow/Green

Plating Code:  
 01-Fu\*Gold Plating  
 02-3u\*Gold Plating  
 03-6u\*Gold Plating  
 04-15u\*Gold Plating  
 05-30u\*Gold Plating

**RHTECP** NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4	SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120
±0.12	±0.15	±0.3	±0.5
			CHK'D BY FENG
			APPR BY ZHAN

Modular jacks with LED, RJ45-8P8C with SHELL

THIRD ANGLE PROJECTION

RHTLY09B-8P8C-W-G/Y-01