

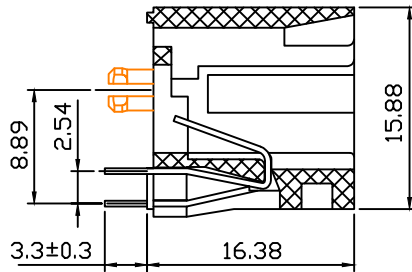



With Panel




SECTION A-A



Without Panel



PCB Layout

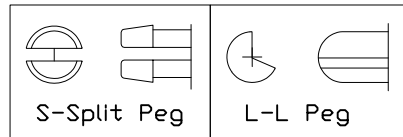

Material:

Housing: PBT+Glass Filled Polyester

Flammability Rating : UL 94V-0

Contacts: Phosphor Bronze $\phi 0.46\text{mm}$

Plating: Gold Plating

Electrical:

Voltage Rating: 125VAC

Current Rating: 1.5A

Contact Resistance: 30m Ω Max

Insulation Resistance: 500Ma Min.

Dielectric Strength: 1000VAC Rms 50Hz, 1 Min.

Durability: 600 cycles Min.

Operation Temperature: $-40^{\circ}\text{C} \sim +70^{\circ}\text{C}$

Order Information

RHTLY54-6P6C-X-X-1-XX

RoHs _____

Contacts: 6P6C _____

Panel Code: W-with panel _____
w/0-without panel _____

Peg Code: L-L Peg S-Split Peg _____

Color Code: 1-Black _____

Plating Code: _____

01-Fu*Gold Plating

02-3u*Gold Plating

03-6u*Gold Plating

04-15u*Gold Plating


05-30u*Gold Plating

NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4			SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120	CHK'D BY FENG	
±0.12	±0.15	±0.3	±0.5	APPR BY ZHAN	

RJ12-6P6C Vertical Modular jacks, Black

THIRD ANGLE PROJECTION



RHTLY54-6P6C-X-X-1-XX