


Material:  
 Housing:PBT+Glass Filled Polyester  
 Flammability Rating :UL 94V-0  
 Contacts: Phosphor Bronze  
 Plating:Gold Plating  
 Electrical:  
 Voltage Rating:125VAC  
 Current Rating:1.5A  
 Contact Resistance:30mΩ Max.  
 Insulation Resistance: 500MΩ Min.  
 Dielectric Strength:1000VAL Rms 50Hz,1 Min.  
 Durability:600 cycles Min.  
 Operation Temperature:-40℃+70℃

Order Information

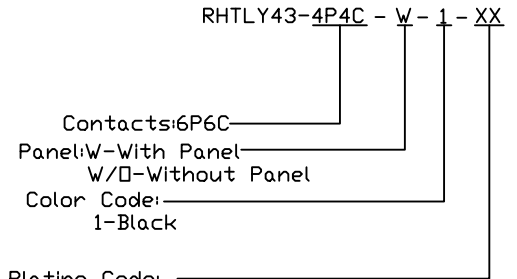

Plating Code:  
 01-Fu" Gold Plating  
 02-3u" Gold Plating  
 03-6u" Gold Plating  
 04-15u" Gold Plating  
 05-30u" Gold Plating

|   |                               |          |                |           |             |                         |                            |                      |  |
|---|-------------------------------|----------|----------------|-----------|-------------|-------------------------|----------------------------|----------------------|--|
| G | NINGBO RHT ELECTRONIC CO.,LTD | UNITS:mm | SHEET SIZE: A4 | SCALE:--- | DRWN BY PAN | RJ11-4P4C Modular jacks |                            |                      |  |
|   |                               | 0~3      | 3~18           | 18~50     | 50~120      | CHK'D BY FENG           | THIRD ANGLE PROJECTION<br> | RHTLY43-4P4C-XX-X-XX |  |
|   |                               | ±0.12    | ±0.15          | ±0.3      | ±0.5        | APPR BY ZHAN            |                            |                      |  |
| 1 | 2                             | 3        | 4              | 5         | 6           | 7                       | 8                          | 9                    |  |