


RoHS Compliance

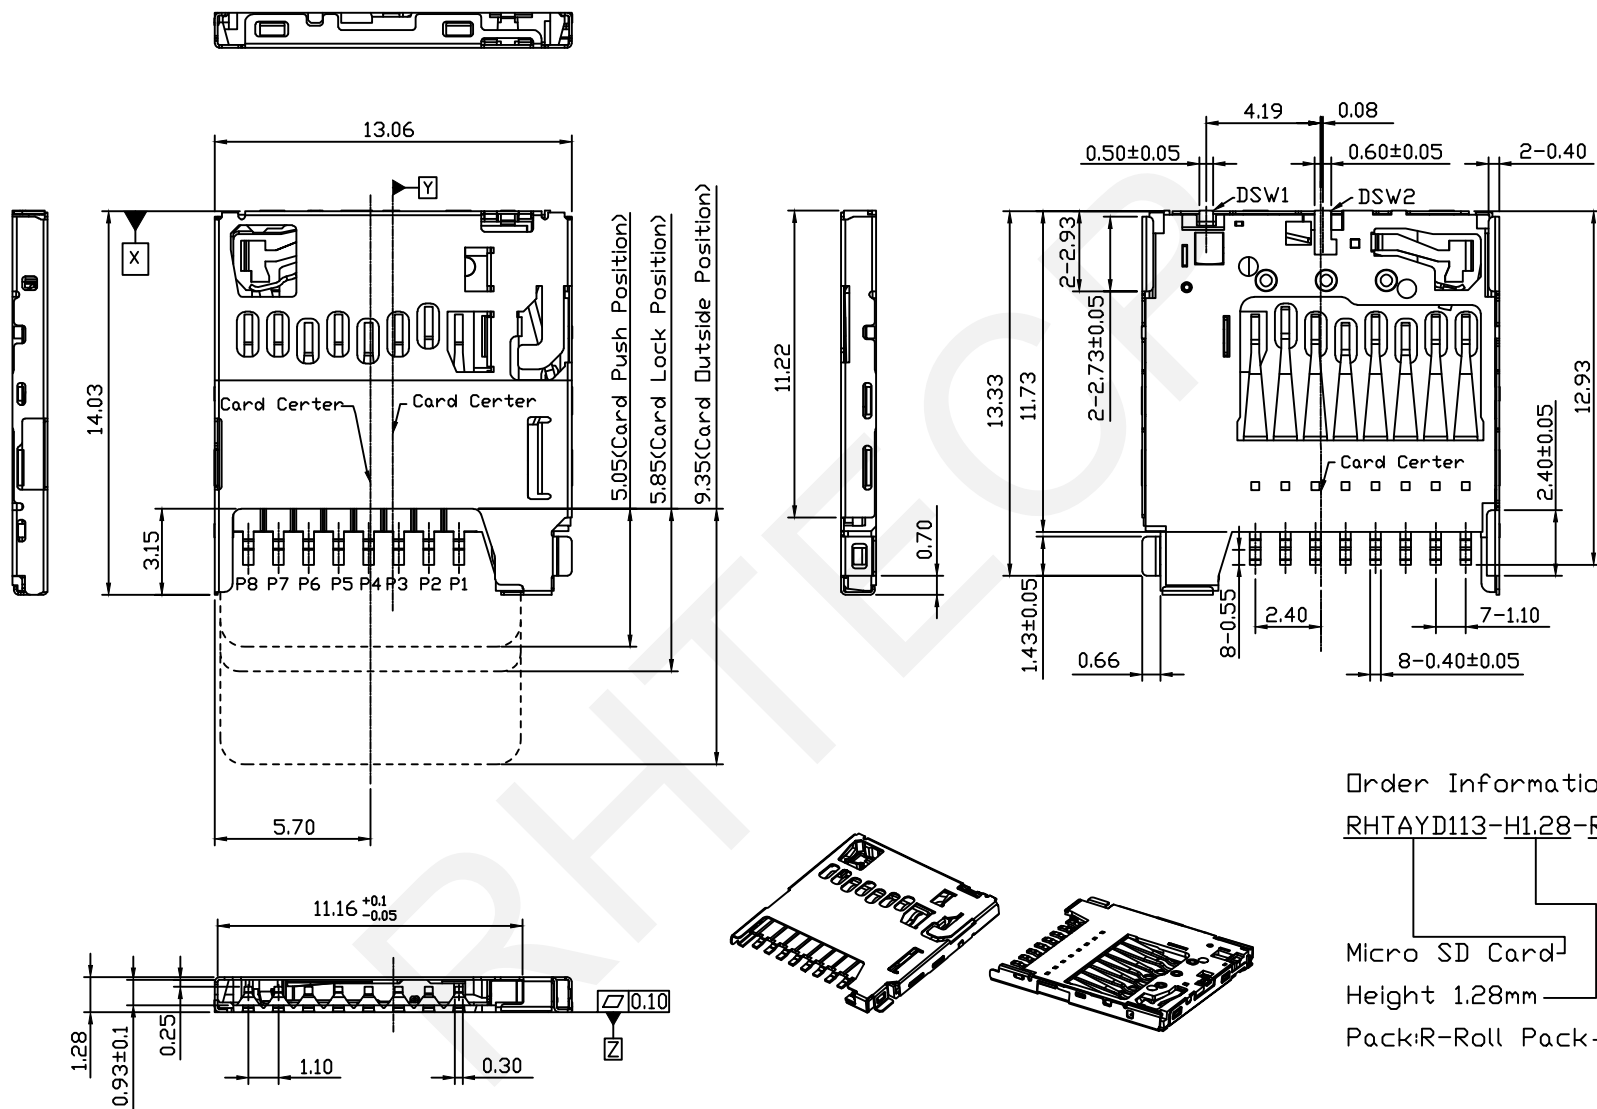


Order Information:

RHTAYD113-H1.28-R

Micro SD Card

Height 1.28mm


Pack:R-Roll Pack

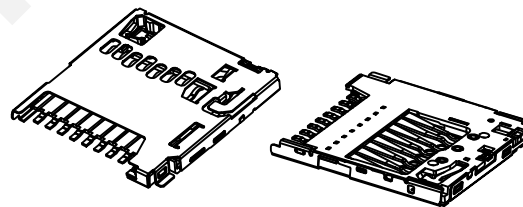


UNITS:mm	SHEET SIZE: A4	SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120
±0.12	±0.15	±0.3	±0.5
CHK'D BY FENG	APPR BY ZHAN		

Micro SD Card CONN;PUSH/PULL,H1.28mm,With CD Pin	
THIRD ANGLE PROJECTION	RHTAYD113-H1.28-R

RHTECP NINGBO RHT ELECTRONIC CO.,LTD



RHTAYD113-H1.28-R

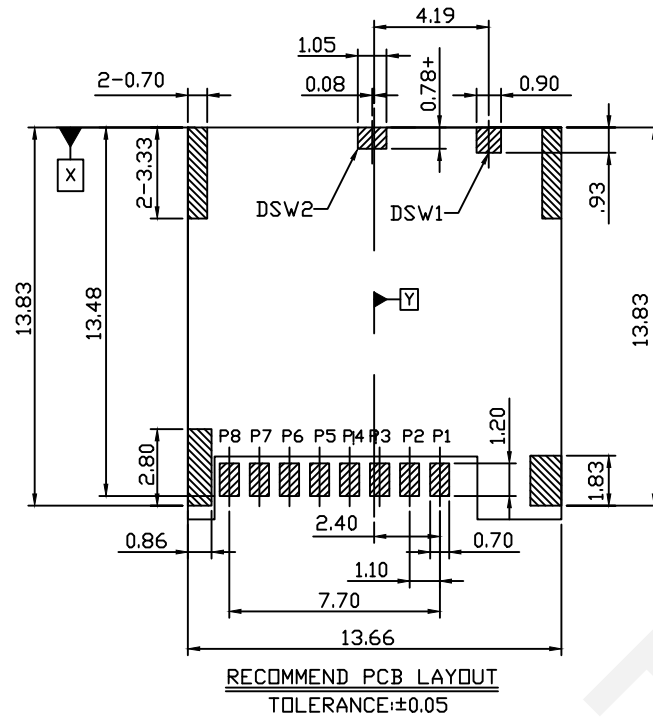

PIN NO.	PIN Assignment
PIN1	DAT2
PIN2	CD/DAT3
PIN3	CMD
PIN4	VDD
PIN5	CLK
PIN6	VSS
PIN7	DAT0
PIN8	DAT1

Pad Area
 Keep Out Area
 Gnd Pattern Only

Materials.

Insulator: High Temperature Thermoplastic
 LCP SZ6505HF Black UL94V-0
 Terminal: Phosphor Bronze (C5210-H, T=0.15mm)
 Shell: SUS301-3/4, T=0.10mm
 Spring: SUS301L=9.80mm
 Slider: PPA Black
 Drawbar: SUS304-H, L=3.85mm

Plating:

Terminal: Plated 80u" Min Ni Overall
 Plated 1u" Min Au Selective Contact Area
 Selective 1u" Min Au Over Ni On Solder Area
 Shell: Plated 1u" min Au Overl 50y" Min Ni

Specification:

1. Current Rating: 0.5A AC/DC Max
2. Voltage Rating: 12V AC/DC
3. Insulation Resistance: 1000MΩ Min. At 500V DL
4. Contact Resistance: 100mΩ Max
5. Ambient Humidity Range: 95% R H Max
6. Ambient Temperature Range: -20°C To +60°C
7. Durability: 5000 Cycles

