
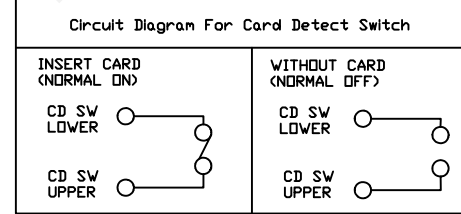


RECOMMENDED PCB LAYOUT(TOP VIEW)  
GENERAL TOLERANCES:±0.05

SOLDER AREA  
 NONE CIRCUIT DIAGRAM AREA

PIN NO.	Description
P1#	C1:VCC
P2#	C5:GND
P3#	C2:RST
P5#	C6:VPP
P6#	C3:CLK
P7#	C7:I/O
P8#	DET



Material:  
 Housing:LCP,UL94V-0  
 Contact:C5210R-H,T=0.15  
 Shell:SUS304,T=0.20  
 Mylar:Polyester.  
 Finish:  
 Contact:Gold Flash Plated On Contact Area;  
 Gold Flash Plated On SolderTails,With Entire  
 Contact Underplated 50u" min Nickel.  
 Shell:50u" Min Nickel Under Plated Overall,  
 Gold Flash Plated On Solder Tails

UNITS:mm	SHEET SIZE: A4	SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120
±0.12	±0.15	±0.3	±0.5
CHK'D BY FENG		APPR BY ZHAN	

SIM CARD CONN:PUSH PUSH,  
6P,H1.85mm,SMD with CD Pin

THIRD ANGLE PROJECTION

RHTAYIM-084-R



NINGBO RHT ELECTRONIC CO.,LTD