

PCB LAYOUT

Pitch	Position	Rows with Contacts	Contact Arrange	Part Number
2.54mm	32	a b		2232
	16	a -		2116
5.08mm	16	a b		2216
	08	a -		2108

Electrical:

Contact Resistance: 30mΩ Max. Insulator
 Insulation Resistance: 1000 MΩ Min. at 500 VDC
 Withstand Voltage: 1000 VAC For 1 Minute
 Current Rating: 2 AMP
 Voltage Rating: 250 VAC
 Operating Temperature: -55°C ~ +105°C

Material: Insulator: Glass-filled Thermoplastic PBT UL94V-0
 Contacts: Male-Brass/Female-Phosphor Bronze
 Plating: Full Gold Or Selected Gold In Mating Area.

ORDER INFORMATION

Product No.: RHTAY2X-2232-MR

Din41612 2x16Pin Two row Short Type


Part Number: 2232/2116/2216/2108

Contact Type: M=Male F=Female

Tail Style: S-4.0mm Straight Pin

W1-13mm Straight Pin

R-Right Pin

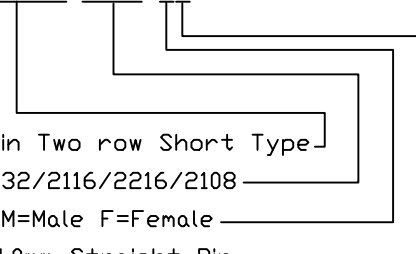





RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4	SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120
±0.12	±0.15	±0.3	±0.5

CHK'D BY FENG
 APPR BY ZHAN

2x16Pin Two row Short B Type
 THIRD ANGLE PROJECTION

 RHTAY2X-2232-MR

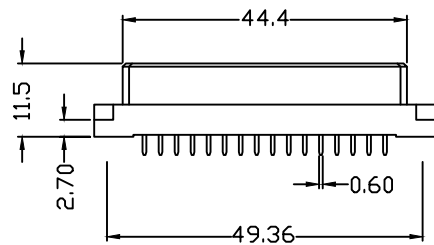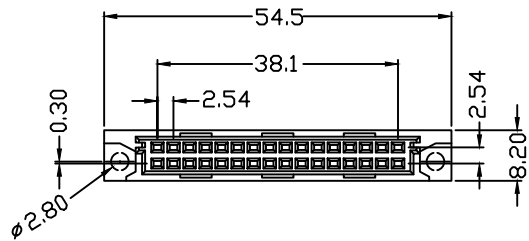

PCB LAYOUT

Pitch	Position	Rows with Contacts	Contact Arrange	Part Number
2.54mm	32	a b		2232
	16	a -		2116
5.08mm	16	a b		2216
	08	a -		2108


Electrical:

Contact Resistance: 30mΩ Max. Insulator
 Insulation Resistance: 1000 MΩ Min. at 500 VDC
 Withstand Voltage: 1000 VAC For 1 Minute
 Current Rating: 2 AMP
 Voltage Rating: 250 VAC
 Operating Temperature: -55°C ~ +105°C

Material: Insulator: Glass-filled Thermoplastic PBT UL94V-0
 Contacts: Male-Brass/Female-Phosphor Bronze
 Plating: Full Gold Or Selected Gold In Mating Area.

ORDER INFORMATION

Product No.: RHTAY2X-2232-FS

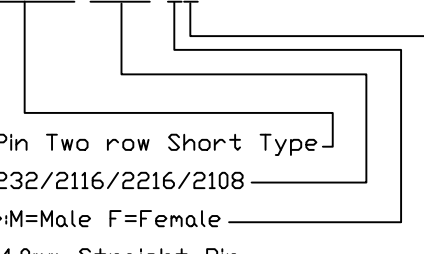

Din41612 2x16Pin Two row Short Type

Part Number: 2232/2116/2216/2108

Contact Type: M=Male F=Female

Tail Style: S-4.0mm Straight Pin

W1-13mm Straight Pin

R-Right Pin







NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4		SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120	CHK'D BY FENG
±0.12	±0.15	±0.3	±0.5	APPR BY ZHAN

2x16Pin Two row Short B Type

THIRD ANGLE PROJECTION

RHTAY2X-2232-FS

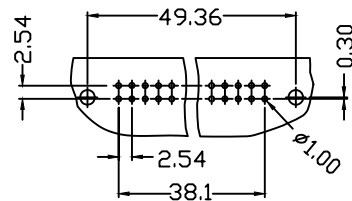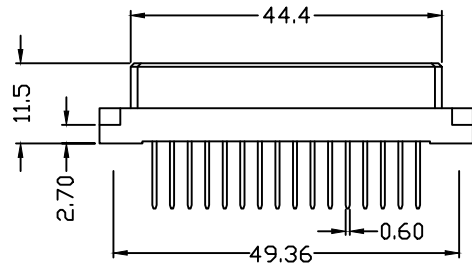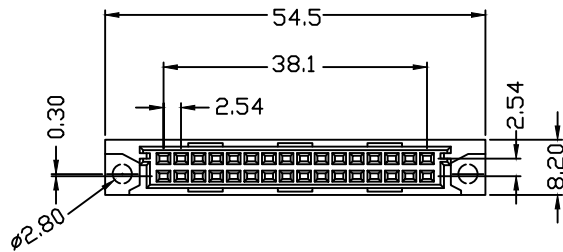

PCB LAYOUT

Pitch	Position	Rows with Contacts	Contact Arrange	Part Number
2.54mm	32	a b		2232
	16	a -		2116
5.08mm	16	a b		2216
	08	a -		2108

Electrical:

Contact Resistance: 30mΩ Max. Insulator
 Insulation Resistance: 1000 MΩ Min. at 500 VDC
 Withstand Voltage: 1000 VAC For 1 Minute
 Current Rating: 2 AMP
 Voltage Rating: 250 VAC
 Operating Temperature: -55°C ~ +105°C

Material: Insulator: Glass-filled Thermoplastic PBT UL94V-0
 Contacts: Male-Brass/Female-Phosphor Bronze
 Plating: Full Gold Or Selected Gold In Mating Area.

ORDER INFORMATION

Product No.: RHTAY2X-2232-FW1

Din41612 2x16Pin Two row Short Type


Part Number: 2232/2116/2216/2108

Contact Type: M=Male F=Female

Tail Style: S-4.0mm Straight Pin

W1-13mm Straight Pin

R-Right Pin




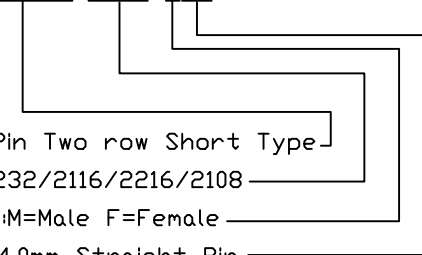


NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4		SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120	CHK'D BY FENG
±0.12	±0.15	±0.3	±0.5	APPR BY ZHAN

2x16Pin Two row Short B Type
 THIRD ANGLE PROJECTION

 RHTAY2X-2232-FW1

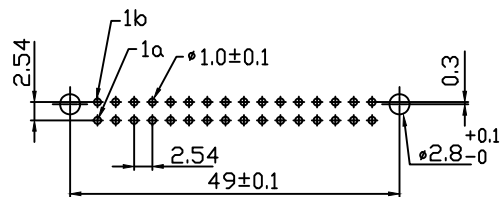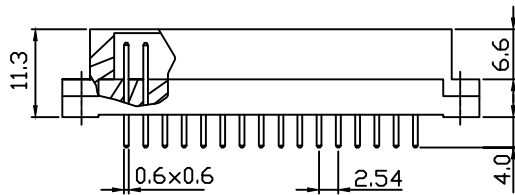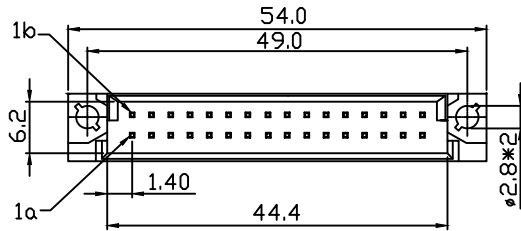

PCB LAYOUT

Pitch	Position	Rows with Contacts	Contact Arrange	Part Number
2.54mm	32	a b		2232
	16	a -		2116
5.08mm	16	a b		2216
	08	a -		2108


Electrical:

Contact Resistance:30mΩ Max.Insulator
 Insulation Resistance:1000 MΩ Min.at 500 VDC
 Withstand Voltage: 1000 VAC For 1 Minute
 Current Rating:2 AMP
 Volatge Rating:250 VAC
 Operating Temperature:-55°C~+105°C

Material:Insulator:Glass-filled Thermoplastic PBT UL94V-0
 Contacts:Male-Brass/Female-Phosphor Bronze
 Plating: Full Gold Or Selected Gold In Mating Area.

ORDER INFORMATION

ProductNo.:RHTAY2X-2232-MS

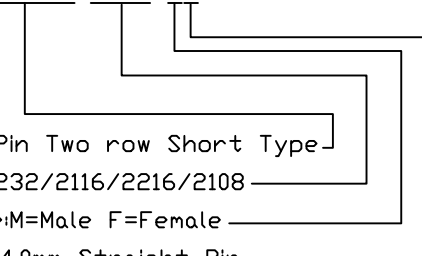

Din41612 2x16Pin Two row Short Type

PartNumber:2232/2116/2216/2108

Contact Type:M=Male F=Female

Tail Style: S-4.0mm Straight Pin

W1-13mm Straight Pin


R-Right Pin



NINGBO RHT ELECTRONIC CO.,LTD




UNITS:mm	SHEET SIZE: A4	SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120
±0.12	±0.15	±0.3	±0.5

CHK'D BY FENG
APPR BY ZHAN



2x16Pin Two row Short B Type

RHTAY2X-2232-MS

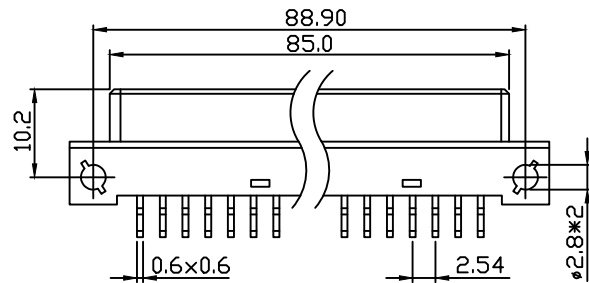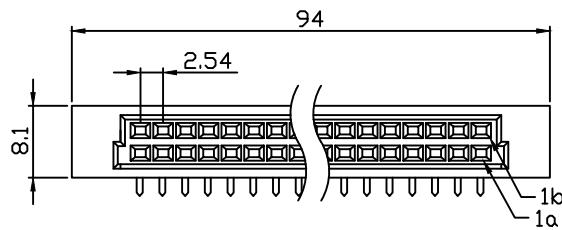

PCB LAYOUT

Pitch	Position	Rows with Contacts	Contact Arrange	Part Number
2.54mm	32	a b		2232
	16	a -		2116
5.08mm	16	a b		2216
	08	a -		2108

Electrical:

Contact Resistance:30mΩ Max.Insulator
 Insulation Resistance:1000 MΩ Min.at 500 VDC
 Withstand Voltage: 1000 VAC For 1 Minute
 Current Rating:2 AMP
 Voltage Rating:250 VAC
 Operating Temperature:-55°C~+105°C

Material:Insulator:Glass-filled Thermoplastic PBT UL94V-0
 Contacts:Male-Brass/Female-Phosphor Bronze
 Plating: Full Gold Or Selected Gold In Mating Area.

ORDER INFORMATION

Product No.:RHTAY2X-2232-FR

Din41612 2x16Pin Two row Short Type


Part Number:2232/2116/2216/2108

Contact Type:M=Male F=Female

Tail Style: S-4.0mm Straight Pin

W1-13mm Straight Pin

R-Right Pin




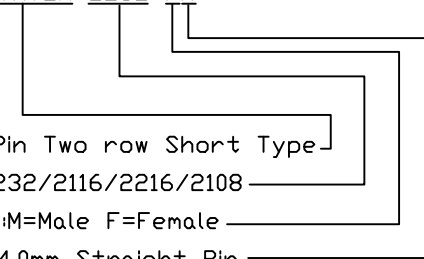


RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4			SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120	CHK'D BY FENG	THIRD ANGLE PROJECTION
±0.12	±0.15	±0.3	±0.5	APPR BY ZHAN	

2x16Pin Two row Short B Type

RHTAY2X-2232-FR

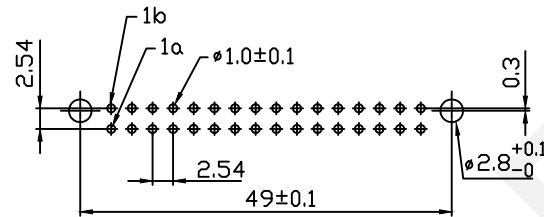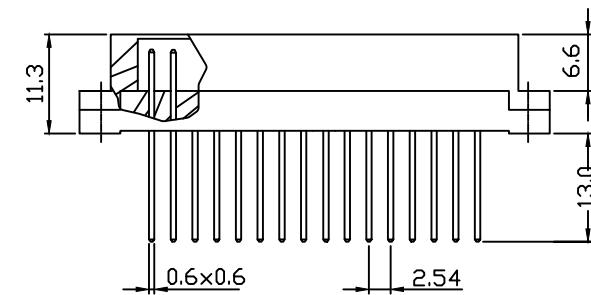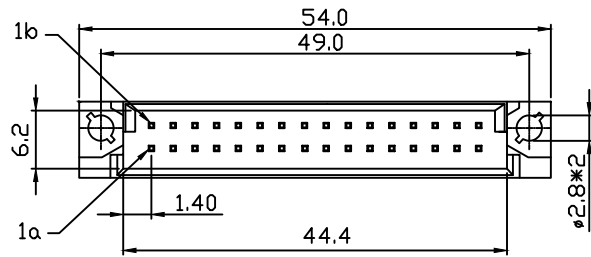

PCB LAYOUT

Pitch	Position	Rows with Contacts	Contact Arrange	Part Number
2.54mm	32	a b		2232
	16	a -		2116
5.08mm	16	a b		2216
	08	a -		2108

Electrical:

Contact Resistance:30mΩ Max.Insulator
 Insulation Resistance:1000 MΩ Min.at 500 VDC
 Withstand Voltage: 1000 VAC For 1 Minute
 Current Rating:2 AMP
 Volatge Rating:250 VAC
 Operating Temperature:-55°C~+105°C

Material:Insulator:Glass-filled Thermoplastic PBT UL94V-0
 Contacts:Male-Brass/Female-Phosphor Bronze
 Plating: Full Gold Or Selected Gold In Mating Area.

ORDER INFORMATION

Product No.:RHTAY2X-2232-MW1

Din41612 2x16Pin Two row Short Type

Part Number:2232/2116/2216/2108

Contact Type:M=Male F=Female

Tail Style: S-4.0mm Straight Pin

W1-13mm Straight Pin

R-Right Pin

NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4			SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120	CHK'D BY FENG	THIRD ANGLE PROJECTION
±0.12	±0.15	±0.3	±0.5	APPR BY ZHAN	

2x16Pin Two row Short B Type
 RHTAY2X-2232-MW1