

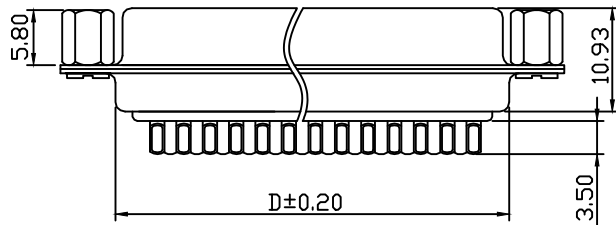


RoHS Compliant

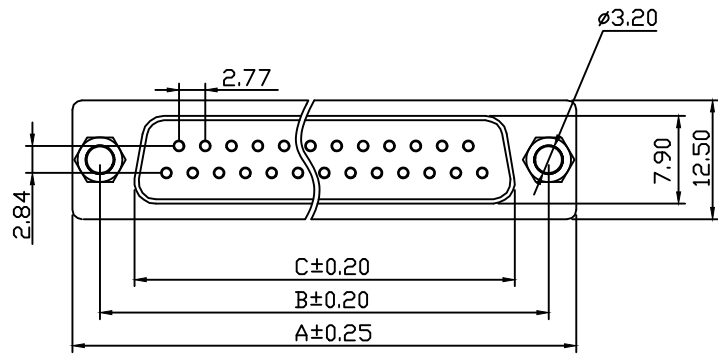

Material:  
 Housing:PBT+30% Glass Filled,UL94V-0  
 Contacts:Brass ,  
 Gold Plating On Contact Arer,  
 Tin On Solder Tail.  
 Shell:Steel,  
 Front Shell Nickel Plating,  
 Back Shell Tin Plating

Electrical Characteristics:  
 Current Rating:5AMP  
 Insulator Resistance:1000MΩ Min. at DC 500V  
 Withstanding Voltage: 500V AC (rms) For 1 Minute  
 Contact Resistance:20MΩ Max. Initial  
 Operating Temperature:-55°C~+105°C

Order Information:

RHTAY13A-XX-F-L

D-SUB Connector,  
 Type:13A  
 XX-No.of 09,15,25,37 Pins  
 Connector Type:  
 M-Male F-Female,  
 Housing Color:  
 L-Blue B-Black W-White

Number of Contacts	DIMENSION			
	A±0.25	B±0.20	C±0.20	D±0.20
09	30.80	25.00	16.50	19.10
15	39.20	33.32	24.70	27.50
25	53.04	47.04	38.50	41.30
37	69.40	63.50	54.80	57.70

UNITS:mm	SHEET SIZE: A4	SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120
±0.12	±0.15	±0.3	±0.5
CHK'D BY FENG		APPR BY ZHAN	

D-SUB Connector,Solder Type,Female,Riveting Before	
THIRD ANGLE PROJECTION	RHTAY13A-XX-F-L






NINGBO RHT ELECTRONIC CO.,LTD



RHTAY13A-XX-F-L

RoHS Compliant

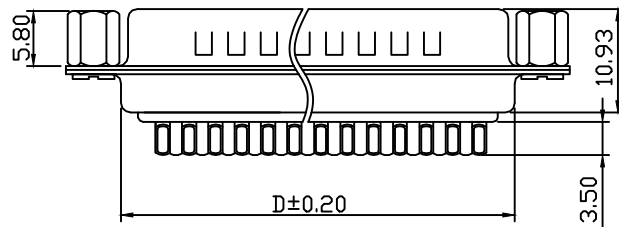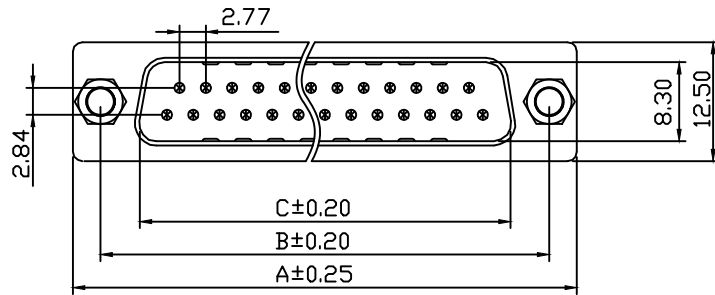

**Material:**

Housing: PBT+30% Glass Filled, UL94V-0

Contacts: Brass,  
Gold Plating On Contact Area,  
Tin On Solder Tail.

Shell: Steel,

Front Shell Nickel Plating,  
Back Shell Tin Plating

**Electrical Characteristics:**

Current Rating: 5AMP

Insulator Resistance: 1000MΩ Min. at DC 500V

Withstanding Voltage: 500V AC (rms) For 1 Minute

Contact Resistance: 20MΩ Max. Initial

Operating Temperature: -55°C ~ +105°C

**Order Information:**

RHTAY13A-XX-M-L

D-SUB Connector,

Type: 13A

XX-No. of 09, 15, 25, 37 Pins

Connector Type:

M-Male F-Female,

Housing Color:

L-Blue B-Black W-White

Number of Contacts	DIMENSION			
	A±0.25	B±0.20	C±0.20	D±0.20
09	30.80	25.00	17.79	19.10
15	39.20	33.32	25.30	27.50
25	53.04	47.04	38.96	41.30
37	69.40	63.50	55.40	57.70




UNITS:mm	SHEET SIZE: A4	SCALE: ---	DRWN BY PAN
0~3	3~18	18~50	50~120
±0.12	±0.15	±0.3	±0.5
CHK'D BY FENG		APPR BY ZHAN	

D-SUB Connector, Solder Type, Female, Riveting Before	
THIRD ANGLE PROJECTION	RHTAY13A-XX-M-L



NINGBO RHT ELECTRONIC CO., LTD

RoHS Compliant

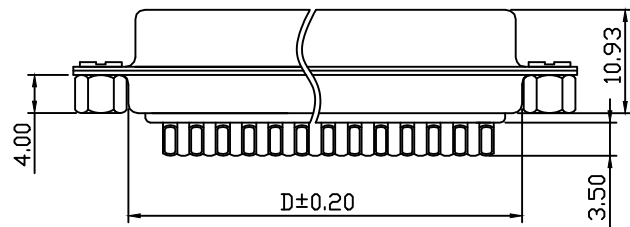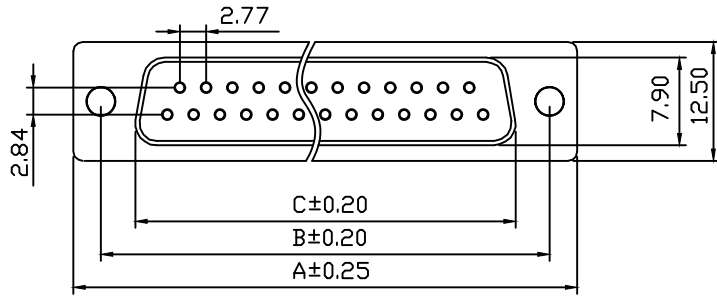

Material:

Housing: PBT+30% Glass Filled, UL94V-0

Contacts: Brass,

Gold Plating On Contact Area,  
Tin On Solder Tail.

Shell: Steel,

Front Shell Nickel Plating,  
Back Shell Tin Plating

Electrical Characteristics:

Current Rating: 5 AMP

Insulator Resistance: 1000MΩ Min. at DC 500V

Withstanding Voltage: 500V AC (rms) For 1 Minute

Contact Resistance: 20MΩ Max. Initial

Operating Temperature: -55°C ~ +105°C

Order Information:

RHTAY13D-XX-F-L

D-SUB Connector,

Type: 13D

XX-No. of 09, 15, 25, 37 Pins

Connector Type: \_\_\_\_\_

M-Male F-Female,

Housing Color: \_\_\_\_\_

L-Blue B-Black W-White




Number of Contacts	DIMENSION			
	A±0.25	B±0.20	C±0.20	D±0.20
09	30.80	25.00	16.50	19.10
15	39.20	33.32	24.70	27.50
25	53.04	47.04	38.50	41.30
37	69.40	63.50	54.80	57.70

UNITS:mm	SHEET SIZE: A4	SCALE: ---	DRWN BY PAN
0~3	3~18	18~50	50~120
±0.12	±0.15	±0.3	±0.5
CHK'D BY FENG		APPR BY ZHAN	

D-SUB Connector, Solder Type, Female, Riveting Before	
THIRD ANGLE PROJECTION	RHTAY13D-XX-F-L

 NINGBO RHT ELECTRONIC CO., LTD

RoHS Compliant

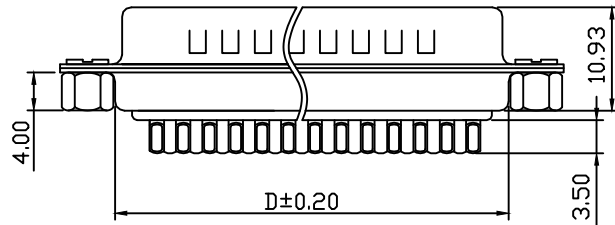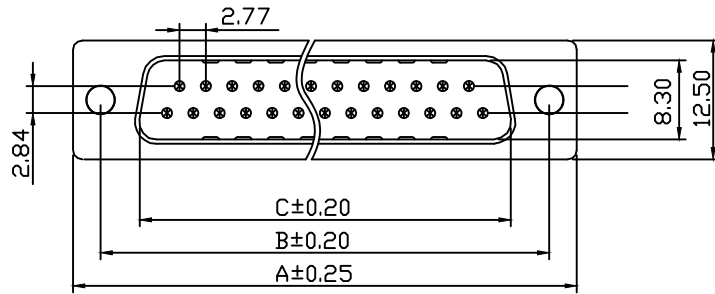

**Material:**

Housing: PBT+30% Glass Filled, UL94V-0

Contacts: Brass,  
Gold Plating On Contact Area,  
Tin On Solder Tail.

Shell: Steel,

Front Shell Nickel Plating,  
Back Shell Tin Plating

**Electrical Characteristics:**

Current Rating: 5AMP

Insulator Resistance: 1000MΩ Min. at DC 500V

Withstanding Voltage: 500V AC (rms) For 1 Minute

Contact Resistance: 20MΩ Max. Initial

Operating Temperature: -55°C ~ +105°C

**Order Information:**

RHTAY13D-XX-M-L

D-SUB Connector,

Type: 13D

XX-No. of 09, 15, 25, 37 Pins

Connector Type:

M-Male F-Female,

Housing Color:

L-Blue B-Black W-White

Number of Contacts	DIMENSION			
	A±0.25	B±0.20	C±0.20	D±0.20
09	30.80	25.00	17.79	19.10
15	39.20	33.32	25.30	27.50
25	53.04	47.04	38.96	41.30
37	69.40	63.50	55.40	57.70

UNITS:mm	SHEET SIZE: A4	SCALE: ---	DRWN BY PAN
0~3	3~18	18~50	50~120
±0.12	±0.15	±0.3	±0.5
CHK'D BY FENG		APPR BY ZHAN	

D-SUB Connector, Solder Type, Female, Riveting Before	
THIRD ANGLE PROJECTION	RHTAY13D-XX-M-L



NINGBO RHT ELECTRONIC CO., LTD