
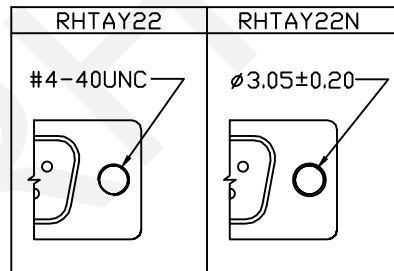
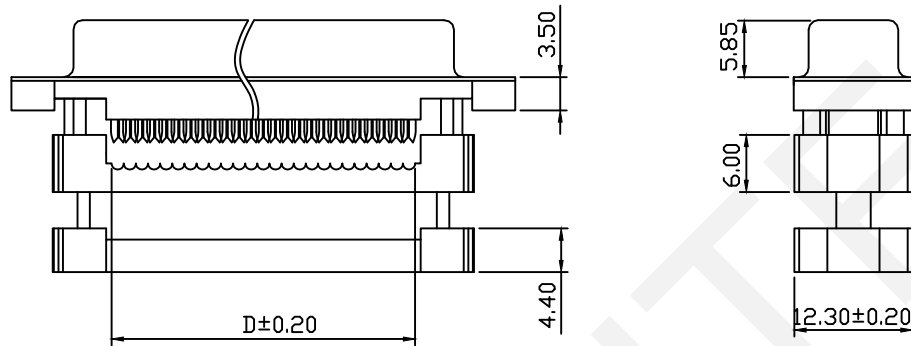


RoHS Compliant

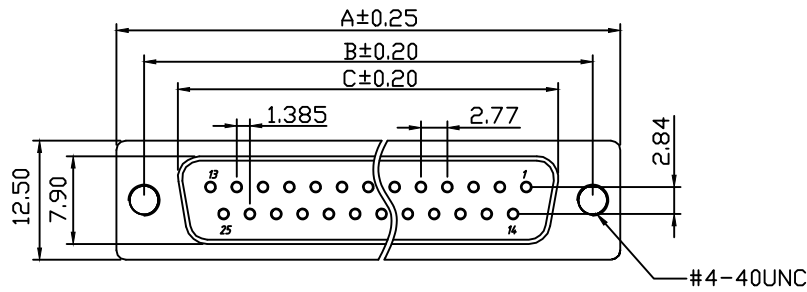

Number of Contacts	DIMENSION			
	A±0.25	B±0.20	C±0.20	D±0.20
09	30.90	24.99	16.30	11.80
15	39.20	33.20	24.60	19.50
25	53.10	47.04	38.30	32.15
37	69.40	63.50	54.80	48.76

Material:

Housing: PBT+30% Glass Filled, UL94V-0
 Contacts: Brass, Gold Plating,
 Shell: Steel, Nickel Plating,

Electrical Characteristics:

Current Rating: 1 AMP
 Insulator Resistance: 1000MΩ Min. at DC 500V
 Withstanding Voltage: 500V AC (rms) For 1 Minute
 Contact Resistance: 20MΩ Max. Initial
 Operating Temperature: -55°C ~ +105°C

Order Information:


RHTAY22-XX-F-L

D-SUB Connector, I DC Type, Type: 22, 22N
 XX-No. of 09, 15, 25, 37, Pins
 Connector Type: M-Male F-Female,
 Housing Color: L-Blue B-Black

UNITS:mm	SHEET SIZE: A4	SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120
±0.12	±0.15	±0.3	±0.5
CHK'D BY FENG		APPR BY ZHAN	

D-SUB Connector, I DC Type, Female




THIRD ANGLE PROJECTION



RHTAY22-XX-F-L

 NINGBO RHT ELECTRONIC CO.,LTD

RoHS Compliant

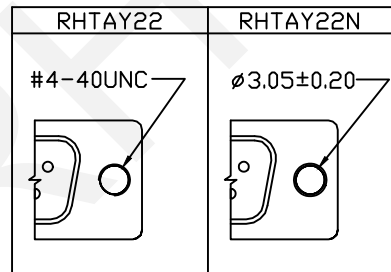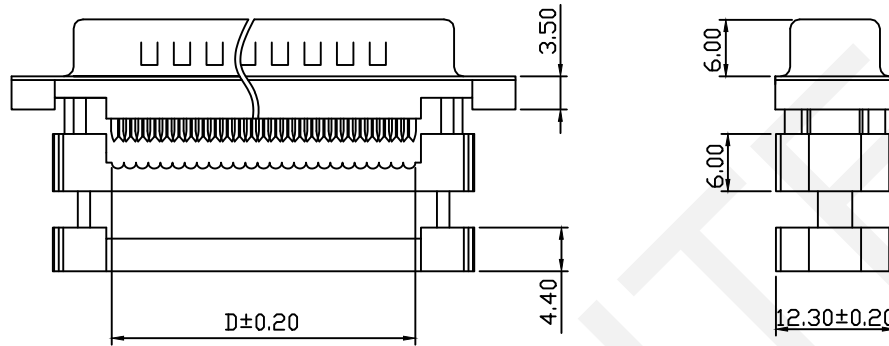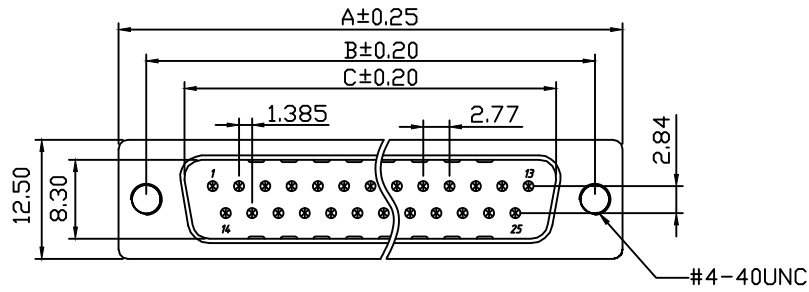

Number of Contacts	DIMENSION			
	A±0.25	B±0.20	C±0.20	D±0.20
09	30.90	24.99	16.90	11.80
15	39.20	33.20	25.25	19.50
25	53.10	47.04	38.96	32.15
37	69.40	63.50	55.42	48.76

Material:

Housing: PBT+30% Glass Filled, UL94V-0

Contacts: Brass, Gold Plating.

Shell: Steel, Nickel Plating,

Electrical Characteristics:

Current Rating: 1 AMP

Insulator Resistance: 1000MΩ Min. at DC 500V

Withstanding Voltage: 500V AC (rms) For 1 Minute

Contact Resistance: 20MΩ Max. Initial

Operating Temperature: -55°C ~ +105°C

Order Information:

RHTAY22-XX-M-L

D-SUB Connector,

I DC Type, Type: 22, 22N

XX-No. of 09, 15, 25, 37, Pins

Connector Type:

M-Male F-Female,

Housing Color:

L-Blue B-Black



NINGBO RHT ELECTRONIC CO., LTD

UNITS:mm	SHEET SIZE: A4	SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120
±0.12	±0.15	±0.3	±0.5

CHK'D BY FENG
APPR BY ZHAN

D-SUB Connector, I DC Type, Male	
THIRD ANGLE PROJECTION	RHTAY22-XX-M-L

