

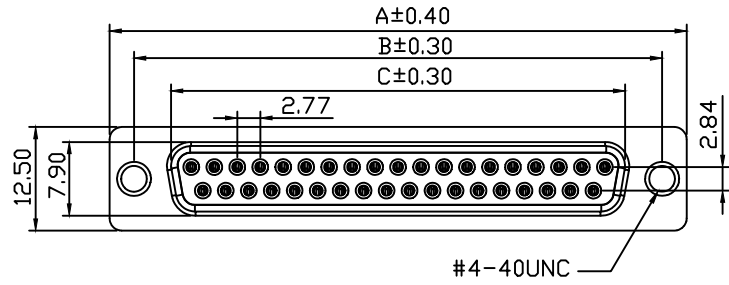


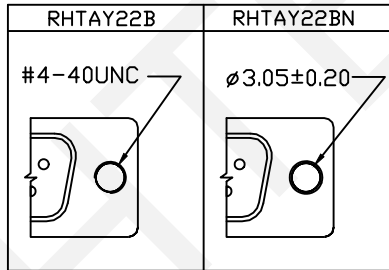

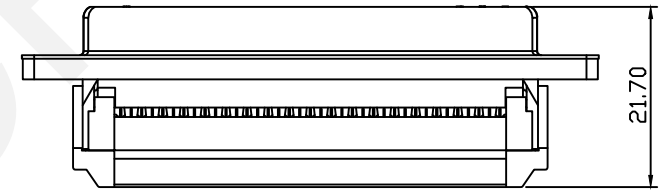



RoHS Compliant



Material:
 Housing: PBT+30% Glass Filled, UL94V-0
 Contacts: Brass, Gold Plating.
 Shell: Steel, Nickel Plating,
 Electrical Characteristics:
 Current Rating: 1 AMP
 Insulator Resistance: 1000MΩ Min. at DC 500V
 Withstanding Voltage: 500V AC (rms) For 1 Minute
 Contact Resistance: 20MΩ Max. Initial
 Operating Temperature: -40°C ~ +105°C

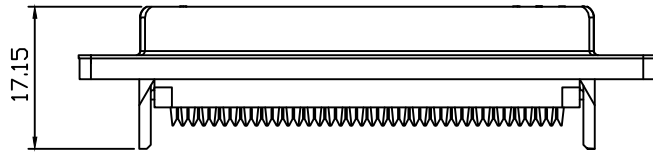

Number Of Contacts	DIMENSION		
	A±0.25	B±0.20	C±0.20
09	30.90	24.99	16.30
15	39.20	33.05	24.60
25	53.10	47.04	38.30
37	69.40	63.50	54.80

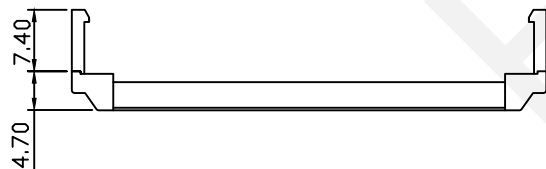

Order Information:

RHTAY22B-XX-F-L

D-SUB Connector,
 I DC Type, Type: 22B, 22BN
 XX-No. of 09, 15, 25, 37, Pins
 Connector Type:
 M-Male F-Female,
 Housing Color:
 L-Blue B-Black

RHTECP NINGBO RHT ELECTRONIC CO., LTD

UNITS:mm SHEET SIZE: A4 SCALE: ---
 0~3 3~18 18~50 50~120
 ±0.12 ±0.15 ±0.3 ±0.5


DRWN BY PAN
 CHK'D BY FENG
 APPR BY ZHAN

D-SUB Connector, I DC Type, Female






THIRD ANGLE PROJECTION

RHTAY22B-XX-F-L

RoHS Compliant

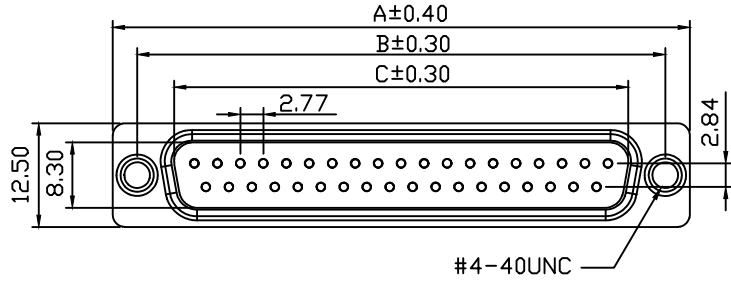




Material:
 Housing: PBT+30% Glass Filled, UL94V-0
 Contacts: Brass, Gold Plating.
 Shell: Steel, Nickel Plating,
 Electrical Characteristics:
 Current Rating: 1 AMP
 Insulator Resistance: 1000MΩ Min. at DC 500V
 Withstanding Voltage: 500V AC (rms) For 1 Minute
 Contact Resistance: 20MΩ Max. Initial
 Operating Temperature: -40°C ~ +105°C

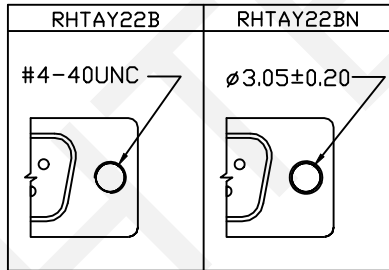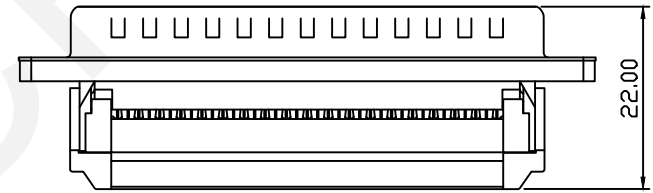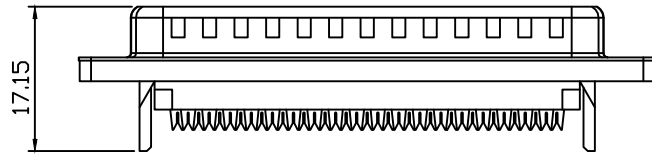

Order Information:

RHTAY22B-XX-M-L

D-SUB Connector,
 I DC Type, Type: 22B, 22BN
 XX-No. of 09, 15, 25, 37, Pins
 Connector Type:
 M-Male F-Female,
 Housing Color:
 L-Blue B-Black

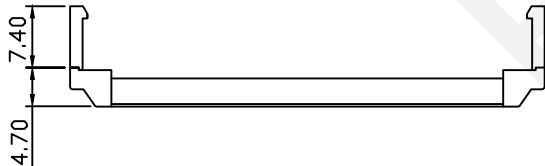


Number Of Contacts	DIMENSION		
	A±0.25	B±0.20	C±0.20
09	30.90	24.99	16.30
15	39.20	33.05	24.60
25	53.10	47.04	38.30
37	69.40	63.50	54.80

RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm SHEET SIZE: A4 SCALE: ---
 0~3 3~18 18~50 50~120
 ±0.12 ±0.15 ±0.3 ±0.5

DRWN BY PAN
 CHK'D BY FENG
 APPR BY ZHAN

D-SUB Connector, I DC Type, Male
 THIRD ANGLE PROJECTION

 RHTAY22B-XX-M-L