
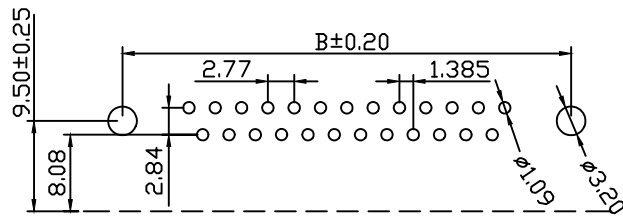

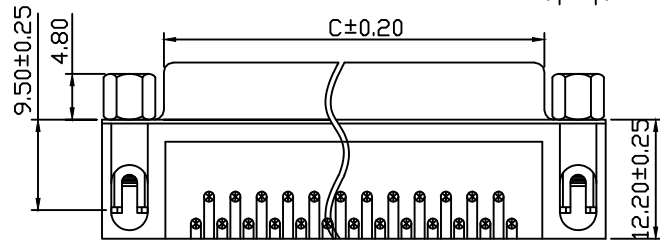


RoHS Compliant

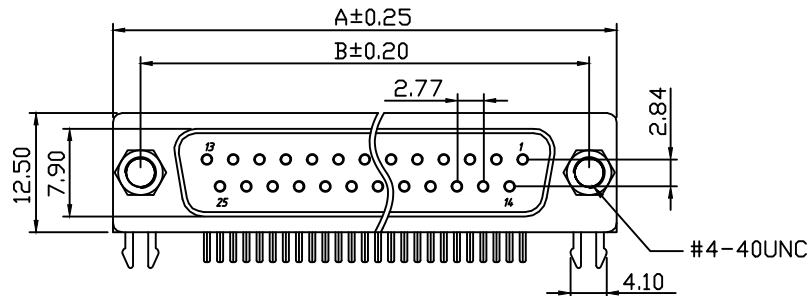

RECOMMENDED PCB LAYOUT
TOLERANCE:±0.05mm

Number of Contacts	DIMENSION		
	A±0.25	B±0.20	C±0.20
09	30.80	24.99	16.30
15	39.20	33.30	24.60
25	53.10	47.04	38.30
37	69.34	63.50	54.80

Material:

Housing:PBT+30% Glass Filled,UL94V-0
Contacts:Brass ,Gold Plating .
Shell:Steel,Nickel Plating,


Electrical Characteristics:

Current Rating: 5 AMP
Insulator Resistance:1000MΩ Min. at DC 500V
Withstanding Voltage: 500V AC (rms) For 1 Minute
Contact Resistance:20MΩ Max. Initial
Operating Temperature:-55°C~+105°C

Order Information:

RHTAYB15-XX-F-X

Type:B15,B15B,B15C
XX-No.of 09,15,25,37,Pins
Connector Type: F-Female,
Housing Color:B-Black




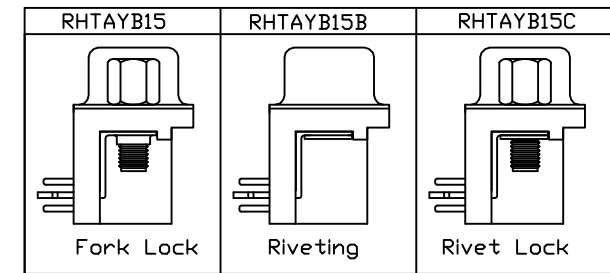


RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4	SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120
±0.12	±0.15	±0.3	±0.5
			CHK'D BY FENG
			APPR BY ZHAN

D-SUB Connector, R/A
Through Hole,8.10mm,Female
THIRD ANGLE PROJECTION
 RHTAYB15-XX-F-X

RoHS Compliant

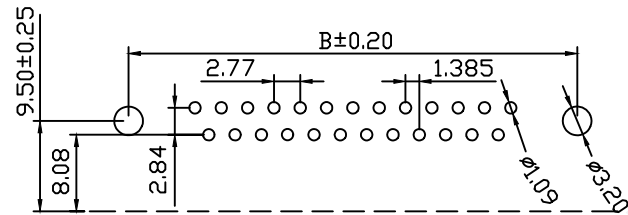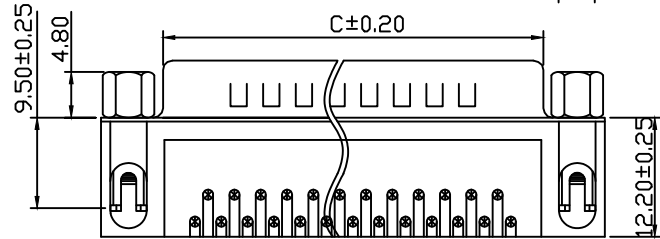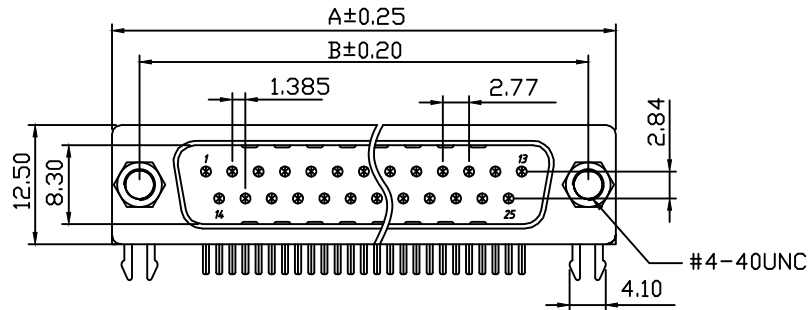

RECOMMENDED PCB LAYOUT
TOLERANCE:±0.05mm

Number of Contacts	DIMENSION		
	A±0.25	B±0.20	C±0.20
09	30.80	24.99	16.90
15	39.20	33.30	25.25
25	53.10	47.04	38.96
37	69.34	63.50	55.42


Material:
Housing:PBT+30% Glass Filled,UL94V-0
Contacts:Brass ,Gold Plating .
Shell:Steel,Nickel Plating,

Electrical Characteristics:
Current Rating: 5 AMP
Insulator Resistance:1000MΩ Min. at DC 500V
Withstanding Voltage: 500V AC (rms) For 1 Minute
Contact Resistance:20MΩ Max. Initial
Operating Temperature:-55°C~+105°C

Order Information:

RHTAYB15-XX-M-X

Type:B15,B15B,B15C
XX-No.of 09,15,25,37,Pins
Connector Type: Male,
Housing Color:B-Black

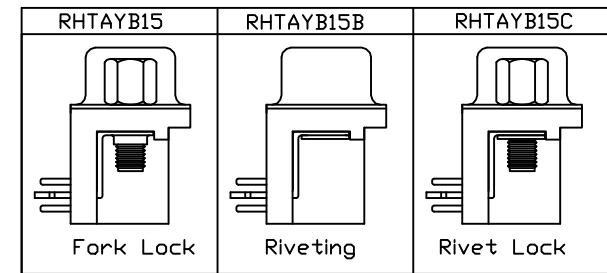

NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4	SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120
±0.12	±0.15	±0.3	±0.5

CHK'D BY FENG
APPR BY ZHAN

D-SUB Connector, R/A Through Hole,8.10mm,Male	
THIRD ANGLE PROJECTION 	RHTAYB15-XX-M-X