
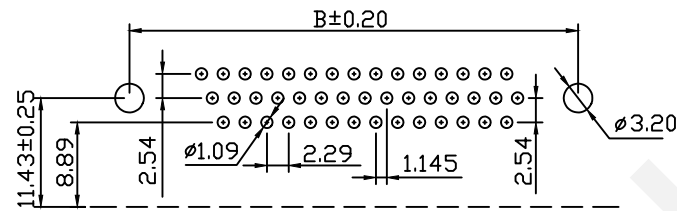
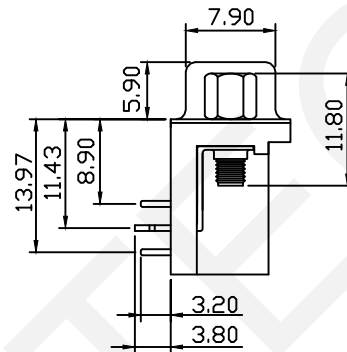
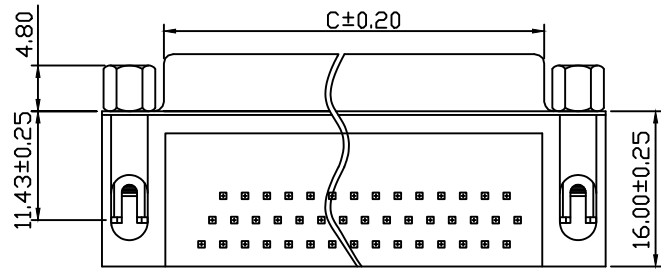


RoHS Compliant

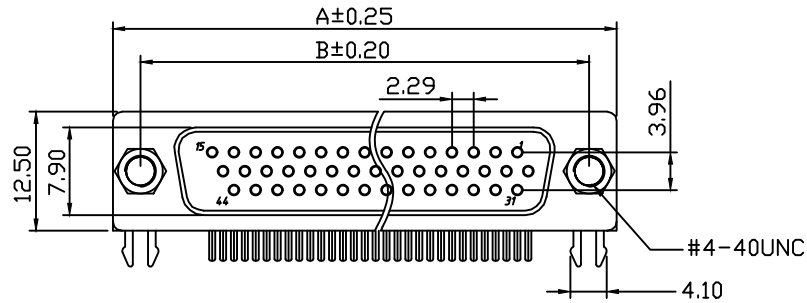

RECOMMENDED PCB LAYOUT
TOLERANCE:±0.05mm

Number of Contacts	DIMENSION		
	A±0.25	B±0.20	C±0.20
15	30.80	24.99	16.30
26	39.20	33.30	24.60
44	53.10	47.04	38.30
62	69.34	63.50	54.80

Material:

Housing:PBT+30% Glass Filled,UL94V-0

Contacts:Brass ,Gold Plating .

Shell:Steel,Nickel Plating,

Electrical Characteristics:

Current Rating: 5 AMP

Insulator Resistance1000MΩ Min. at DC 500V

Withstanding Voltage: 500V AC (rms) For 1 Minute

Contact Resistance:20MΩ Max. Initial

Operating Temperature:-55°C~+105°C

Order Information:

RHTAYC15-XX-F-B

Type:C15,C15B,C15C


XX-No.of 15,26,44,62 Pins

Connector Type:

F-Female,M-Male

Housing Color:

B-Black L-Blue

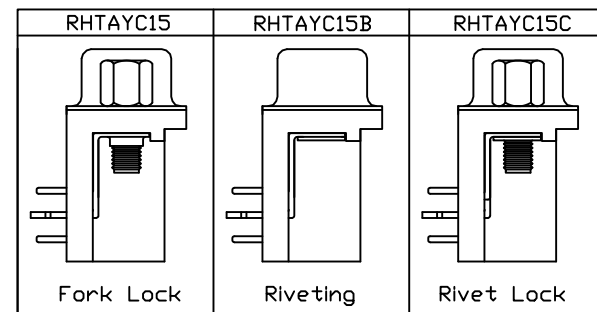





NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4		SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120	CHK'D BY FENG
±0.12	±0.15	±0.3	±0.5	APPR BY ZHAN

D-SUB Connector, R/A
Through Hole,8.89mm,Female
THIRD ANGLE PROJECTION

RHTAYC15-XX-F-B

RoHS Compliant

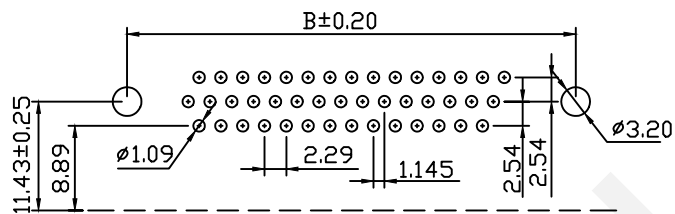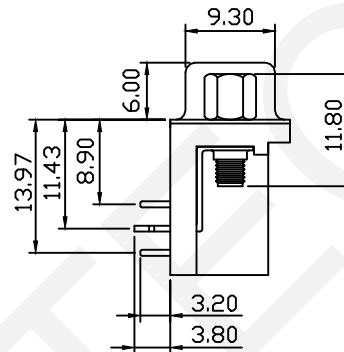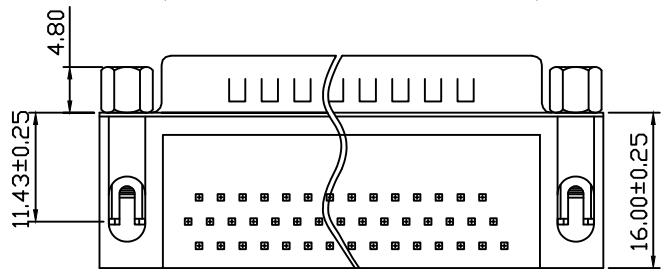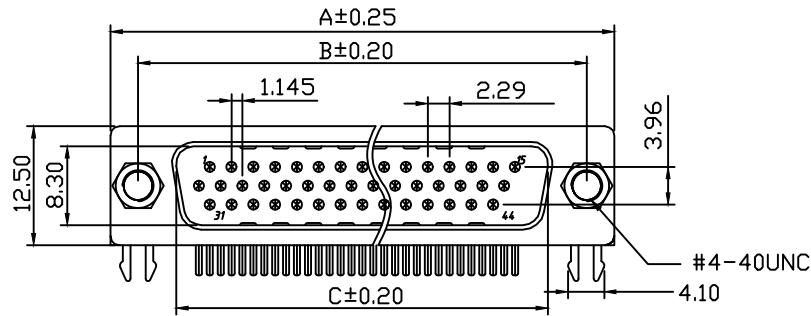

RECOMMENDED PCB LAYOUT
TOLERANCE:±0.05mm

Number Of Contacts	DIMENSION		
	A±0.25	B±0.20	C±0.20
15	30.80	24.99	16.85
26	39.20	33.30	25.30
44	53.10	47.04	38.96
62	69.34	63.50	55.42

Material:

Housing:PBT+30% Glass Filled,UL94V-0
Contacts:Brass ,Gold Plating ,
Shell:Steel,Nickel Plating,

Electrical Characteristics:

Current Rating: 5 AMP
Insulator Resistance:1000MΩ Min. at DC 500V
Withstanding Voltage: 500V AC (rms) For 1 Minute
Contact Resistance:20MΩ Max. Initial
Operating Temperature:-55°C~+105°C

Order Information:

RHTAYC15-XX-M-B

Type:C15,C15B,C15C


XX-No.of 15,26,44,62 Pins

Connector Type:

F-Female,M-Male

Housing Color:

B-Black L-Blue

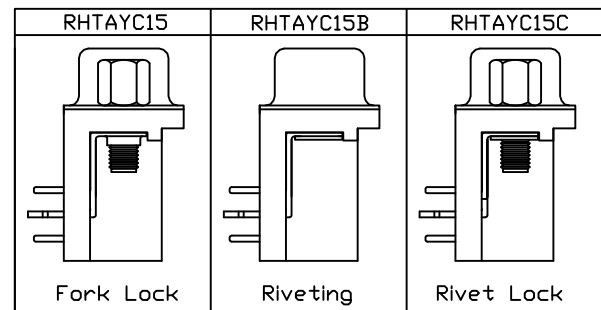

RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4		SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120	CHK'D BY FENG
±0.12	±0.15	±0.3	±0.5	APPR BY ZHAN

D-SUB Connector, R/A
Through Hole,8.89mm,Male
THIRD ANGLE PROJECTION
RHTAYC15-XX-M-B