

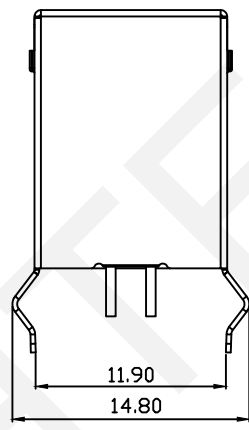
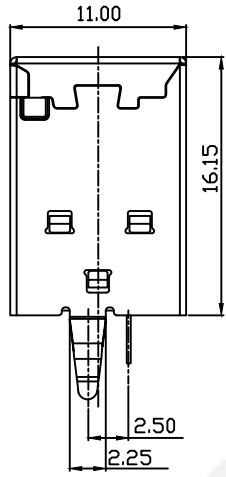


RECOMMENDED P.C.B.LAYOUT
TOP VIEW(TOLRANCE:±0.05)

NOTE:
 1.ELECTRICAL CHARACTERISTICS
 1-1.VOLTAGE RATING:30V MAX
 1-2.CURRENT RATING:2.0A MAX
 1-3.CONTACT RESISTANCE:30 Milliohms MAX.
 1-4.INSULATION RESISTANCE:1000 Megohms MIN.
 1-5.DIELECTRIC WITHSTANDING VOLTAGE:500V AC FOR 1 MINUTE.
 2.MECHANICAL CHARACTERISTICS
 2-1. MATING FORCE:35N MAX
 2-2.UNMATING FORCE:10N MIN
 2-3.DURIBILITY:5000 CYCLES
 3.SALT SPRAY: 24H
 4.OPERATING TEMPERATURE:-40℃~85℃
 5.ROHS 2011/65/EU COMPLIANT.
 6.MPQ :100PCS/TRAY.

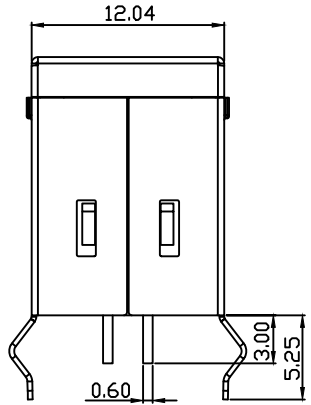

D	COVER	1	PBT,UL94V-0	WHITE
C	SHELL	1	SPCC	Ni PLATING
B	CONTACT	4	C2680	Gold Flash On Contact Area Tin Plated On Solder Tail All Over Nickel Plated
A	HOUSING	1	PBT,UL94V-0	WHITE
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR