

NO	P/N	QTY	Material
1	UP Shield	1	H65Y
2	Insert	1	PBT
3	Terminal	6	Qsn6.5-0.1
4	Doen Shield	1	H65Y

Material:

Housing: Termoplastic, UL94V-0

Contact: Copper Alloy

Shell: Copper Alloy

Pin Plated: Gold 3u" Over 50u" Nickel

Electrical Characteristics:



Voltage Current Rating: 1.5AMP.40V AC

Insulation Resistance: 500MΩ Min

Contact Resistance: 50mΩ Max

Dielectric Withstanding Voltage: 500V AC

Temperature Range: -20°C~+85°C

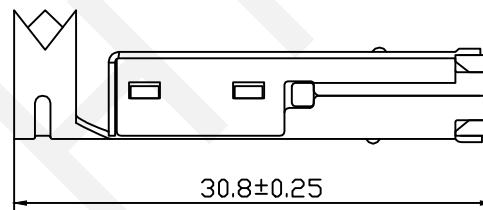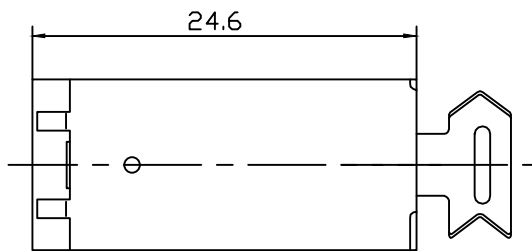

ORDER INFORMATION

Product NO.: RHTAY394-6FD-B

IEEE 394 TYPE

Color: W=WHITE B=BLACK

**RHTECP** NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

IEEE 394 6 Pin Plug Solder For Cable Ass'Y

0~3

3~18

18~50

50~120

CHK'D BY FENG

THIRD ANGLE PROJECTION


±0.12

±0.15

±0.3

±0.5

APPR BY ZHAN



RHTAY394-6FD