

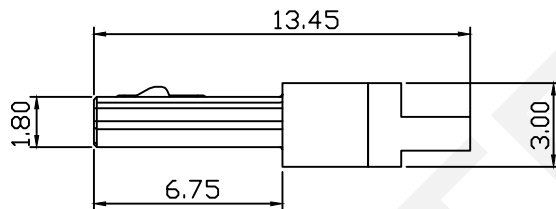


Material
 Housing:Hing Temperature Thermoplastic,
 UL94V-0 LCP,Black
 Contact:Copper Alloy C2680
 Shell:Copper Alloy C2680/SPCC

Finish:
 Contact:Plated Gold In Mating Area:Tin On Solder Tails
 Shell:Nickel Plating




Electrical:
 Current Rating:1.5A/Contact Terminal.
 Voltage Rating:30V DC
 Contact Resistance:30mΩ Max.
 Dielectric Withstanding Voltage:500 V AC AT Sea Level.
 Insulation Resistance: 1000MΩ Min.
 Connector Mate And Unmated Force
 Mate Force:3.75kgf Max.
 Unmated Force:1.02kgf Min.
 Terminal Retention:1.2kgf Min

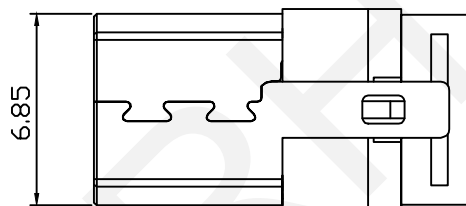

NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4				SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120	CHK'D BY FENG	CONN PLUG MICRO USB TYPE B Solder T3.0,L6.8mm	
±0.12	±0.15	±0.3	±0.5	APPR BY ZHAN	THIRD ANGLE PROJECTION	RHTAY35-1



RHTAY35-1