


**RECOMMENDED PCB LAYOUT**  
THICKNESS:1.0mm

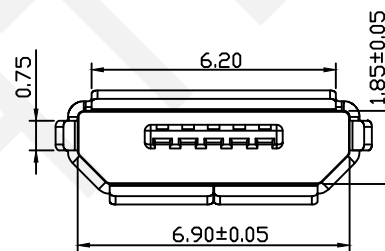


**Material**  
 Housing: LCP, UL94V-0, Black.  
 Contact: Copper Alloy, Gold  
 Contact Type: Stamped  
 Shielding: Stainless Steel Matt Tin Plated

**Electrical:**  
 Current Rating: 1.8 A Pin1 & Pin 5  
 1.0 A Other Pins  
 Voltage Rating: 30V DC  
 Contact Resistance: 30mΩ Max.  
 Withstanding Voltage: 100 Vac/Min  
 Insulation Resistance: 1000MΩ Min.  
 Operating Temperature: -40°C Up To +85°C  
 Compliance: Lead Free And RoHS

**Order Information**

RHTAY233B-B



NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4	SCALE:----	DRWN BY PAN
0~3	3~18	18~50	50~120
±0.12	±0.15	±0.3	±0.5

CHK'D BY FENG
APPR BY ZHAN

CONN RCPT 5POS MICRO USB Straigth

THIRD ANGLE PROJECTION



RHTAY233B-B