

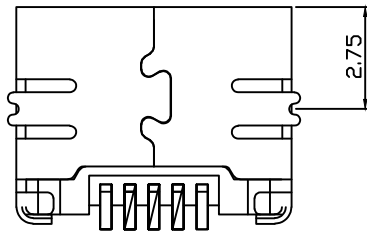
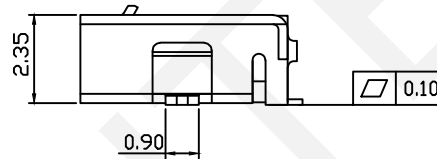


RECOMMENDED PCB LAYOUT

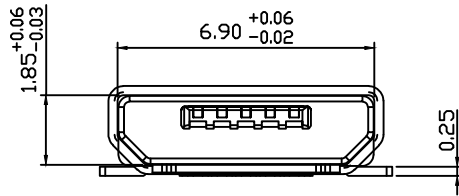


Material:
 Rubber Core:LCP
 Shell: C2680/SPCC
 Terminal:C2680
 Salt Apray Requirements:24H

Electrical:
 Rated Current:2A
 Rated Voltage:5V
 Dielectric Withstanding Voltage:500V AC for 1 Min.
 Contact Resistance:30mΩ Max
 Insulation Resistance:100MΩ Min.


Mechanical Properties:
 Insertion Force:5~20N
 Pullout Force: 5~20N
 Life Test: 5000 Cycles
 Thrust: 50N Min
 Peel Strength: 150N Min
 Working Temperature:-20°C~85°C

Order Information
RHTAY241-B-R



RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4			SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120	CHK'D BY FENG	CONN RCPT 5POS MICRO USB SMD
±0.12	±0.15	±0.3	±0.5	APPR BY ZHAN	THIRD ANGLE PROJECTION



RHTAY241-B-R