
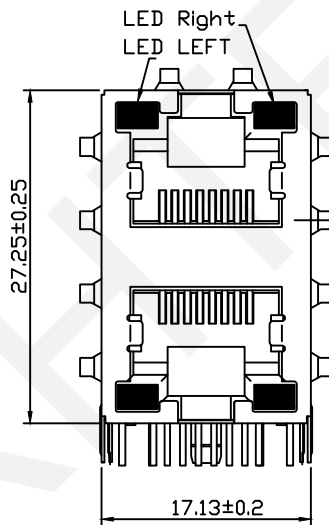


PCB Layout

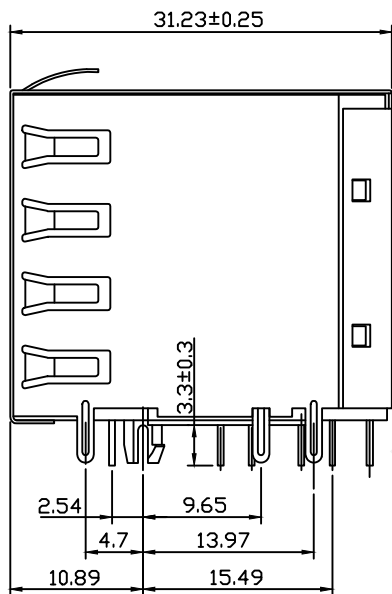

Material:
 Housing:PBT+Glass Filled Polyester
 Flammability Rating : UL94V-0
 Contacts: Phosphor Bronze $\varnothing 0.46\text{mm}$
 Plating:Gold Plating
 Shield:Brass,Tin Plating

Electrical:
 Voltage Rating:125VAC
 Current Rating:1.5A
 Contact Resistance:30m Ω Max.
 Insulation Resistance: 500M Ω Min.
 Dielectric Strength:1000VAC Rms50Hz, 1 Min.
 Durability:600 Cycles Min.
 Operation Temperature:-40 $^{\circ}\text{C}$ +70 $^{\circ}\text{C}$


Order Information
 RHTLY13-8P8C-2X1-x-G/Y-xx

Contacts:8P8C
 Shield Code:
 1-With Shield
 2-With EMI Shield
 LED Code: LEFT/RIGHT
 G/Y-Green/Yellow
 Y/G-Yellow/Green
 Plating Code:
 01-Fu' Gold Plating
 02-3u' Gold Plating
 03-6u' Gold Plating
 04-15u' Gold Plating
 05-30u' Gold Plating

RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4		SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120	CHK'D BY FENG
±0.12	±0.15	±0.3	±0.5	APPR BY ZHAN

Modular Jacks,RJ45-8P8C
 2x1 Jack Shield With LED

THIRD ANGLE PROJECTION
 RHTLY13-8P8C-2X1-x-X/X-xx