

Safety Approval : UL Water Proof IP≥55  
 Subminiature Aviation Linkers Are Widely Used For The Hi-Tech Trade. The Appearances Of The Products Has Two Kinds, Plug-type And Thread Type. Used In The Installation Of The Panel, Small, Exquisite And Sensitive. It's Nickel-plated And Easy To Plug-in.

**ORDER INFORMATION**


Product No.: RHTDY25-M12-2 F1

Pos No. \_\_\_\_\_

Dental Regulations: M12 \_\_\_\_\_

Number Of Contacts: 2,3,4,5,6P

TYPE Ordering



**Electrical Characteristics:**


- Rated Current: 5A
- Rated Voltage: 125V
- Operation Voltage: 200 VAC
- Withstanding Voltage :1500 VAC
- Insulation resistance :1500MΩ DC 500V
- Contact Resistance: 10 mΩ DC1A
- Solder Cup Mouth Diameter: 0.9 mm
- Solder Diameter: 1.15mm

**RHTECP** NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4			SCALE:---
0~3	3~18	18~50	50~120	
±0.12	±0.15	±0.3	±0.5	

DRWN BY PAN  
 CHK'D BY FENG  
 APPR BY ZHAN

Connectors Industrial Circular Series  
 THIRD ANGLE PROJECTION  
  
 RHTDY25-M12-2-F1

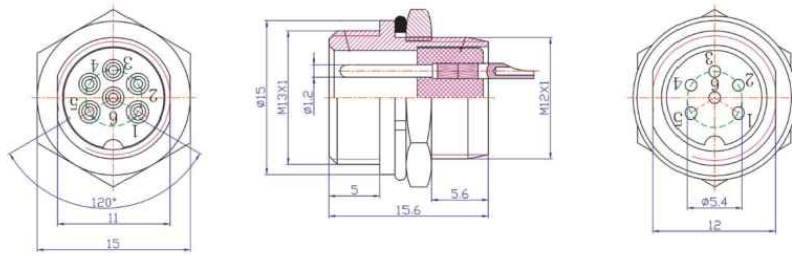

Safety Approval : UL Water Proof IP≥55  
 Subminiature Aviation Linkers Are Widely Used For The Hi-Tech Trade. The Appearances Of The Products Has Two Kinds, Plug-type And Thread Type. Used In The Installation Of The Panel, Small, Exquisite And Sensitive. It's Nickel-plated And Easy To Plug-in.

ORDER INFORMATION

Product No.: RHTDY25-M12-2 M1

Pos No. \_\_\_\_\_

Dental Regulations: M12 \_\_\_\_\_

Number Of Contacts: 2,3,4,5,6P \_\_\_\_\_

TYPE Ordering

2P	3P	4P	5P	6P



Electrical Characteristics:

Rated Current: 5A

Rated Voltage: 125V

Operation Voltage: 200 VAC

Withstanding Voltage : 1500 VAC

Insulation resistance : 1500MΩ DC 500V

Contact Resistance: 10 mΩ DC1A

Solder Cup Mouth Diameter: 0.9 mm

Solder Diameter: 1.15mm

NINGBO RHT ELECTRONIC CO.,LTD


UNITS:mm	SHEET SIZE: A4			SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120	CHK'D BY FENG	
±0.12	±0.15	±0.3	±0.5	APPR BY ZHAN	

Connectors Industrial Circular Series

THIRD ANGLE PROJECTION



RHTDY25-M12-2-M1

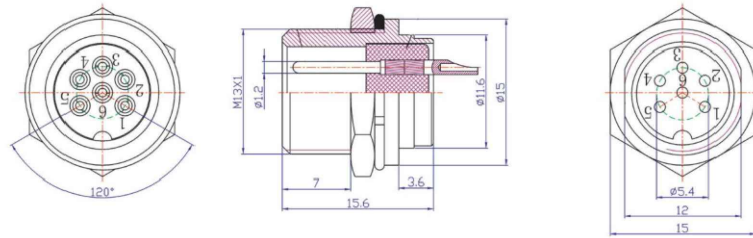

Safety Approval : UL Water Proof IP≥55  
 Subminiature Aviation Linkers Are Widely Used For The  
 Hi-Tech Trade. The Appearances Of The Products Has  
 Two Kinds, Plug-type And Thread Type. Used In The  
 Installation Of The Panel, Small, Exquisite And Sensitive.  
 It's Nickel-plated And Easy To Plug-in.

**ORDER INFORMATION**

Product No.: RHTDY25-M12-2 M2

Pos No. \_\_\_\_\_

Dental Regulations: M12 \_\_\_\_\_

Number Of Contacts: 2,3,4,5,6P

TYPE Ordering

2P	3P	4P	5P	6P



**Electrical Characteristics:**

Rated Current: 5A

Rated Voltage: 125V

Operation Voltage: 200 VAC

Withstanding Voltage : 1500 VAC

Insulation resistance : 1500MΩ DC 500V

Contact Resistance: 10 mΩ DC1A

Solder Cup Mouth Diameter: 0.9 mm

Solder Diameter: 1.15mm

NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4			SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120	CHK'D BY FENG	
±0.12	±0.15	±0.3	±0.5	APPR BY ZHAN	

Connectors Industrial Circular Series

THIRD ANGLE PROJECTION



RHTDY25-M12-2-M2