





With Panel

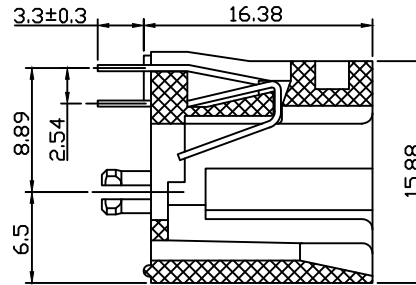

Without Panel



SECTION A-A



PCB Layout

Material:
 Housing:PBT+Glass Filled Polyester
 Flammability Rating:UL94V-0
 Contacts: Phosphor Bronze Ø0.46mm
 Plating:Gold Plating

Electrical:
 Voltage Rating:125VAC
 Current Rating:1.5A
 Contact Resistance:30mΩ Max.
 Insulation Resistance: 500MΩ Min.
 Dielectric Strength:1000VAC Rms 50Hz,1 Min.
 Durability:600 cycles Min.
 Operation Temperature:-40℃~+70℃

Order Information
 RHTLY56-8P8C-X-X-1-XX


Contacts:8P8C
 Panel Code: _____
 W-With Panel
 W/D-Without Panel
 Peg Code: _____
 L-L Peg S-Split Peg
 Color Code:1-Black
 Plating Code: _____
 01-Fu' Gold Plating
 02-3u' Gold Plating
 03-6u' Gold Plating
 04-15u' Gold Plating
 05-30u' Gold Plating

NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4		SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120	CHK'D BY FENG
±0.12	±0.15	±0.3	±0.5	APPR BY ZHAN

RJ45-8P8C Vertical Modular jacks,Black

THIRD ANGLE PROJECTION



RHTLY56-8P8C-X-X-1-XX