


Technical Parameters:
 Rated Voltage:DC 30V
 Rated Current: 0.5 A
 Contact Resistance:0.03Ω,Max
 Insulation Resistance:100MΩ,Min
 Pressure:AC500V(50Hz)/1minute
 Insertion Force:2-20 N
 Life: 50000 Times
 Operating Temperature:-30℃~70℃
 Material:
 Housing Material:PBT
 Center Pin Material:
 Terminal1:Brass
 Terminal2:Copper Alloy
 Terminal3:Brass
 Bushing :Brass



| | |
|-----------|------|
| MODEL NO. | 003B |
| D DIA | Ø4 |
| SCHEMATIC | |

ORDER INFORMATION
RHTAYG2.5-003B
 2.5mm Mono Jack Type
 A: With NUT
 B: Without NUT

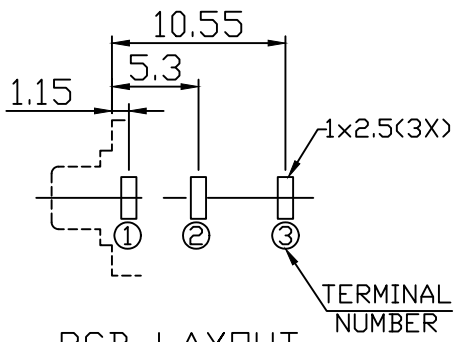

NINGBO RHT ELECTRONIC CO.,LTD

| | | | | | |
|----------|----------------|-------|--------|---------------|----------------------------|
| UNITS:mm | SHEET SIZE: A4 | | | SCALE:--- | DRWN BY PAN |
| 0~3 | 3~18 | 18~50 | 50~120 | CHK'D BY FENG | THIRD ANGLE PROJECTION |
| ±0.12 | ±0.15 | ±0.3 | ±0.5 | APPR BY ZHAN | |

Dip Mono Jack
 RHTAYG2.5-003B