



WASHER



NUT




Pin Hole Layout  
Jack Bottom View

Technical Parameters:  
 Contact resistance: 0.03Ω,Max  
 Insulation Resistance: 100MΩ,Min  
 Rated Load: DC 50V 1A  
 Withstand Voltage: 500V AC/1 Minute/50Hz  
 Insertion Force :5-40 N  
 Life: 5000 Times  
 Operating Temperature:-30°C ~70°C

Material:  
 Housing : PC  
 Contact : Copper

ORDER INFORMATION  
 RHTAYG6.3-008AA

6.3mm Stereo Jack Series  
 Schematic See Annex

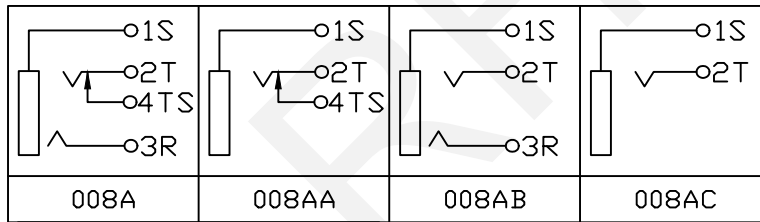

NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4			SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120	CHK'D BY FENG	
±0.12	±0.15	±0.3	±0.5	APPR BY ZHAN	

Stereo Jack Series  
 THIRD ANGLE PROJECTION  
  
 RHTAYG6.3-008AA