



PCB LAYOUT TOP VIEW

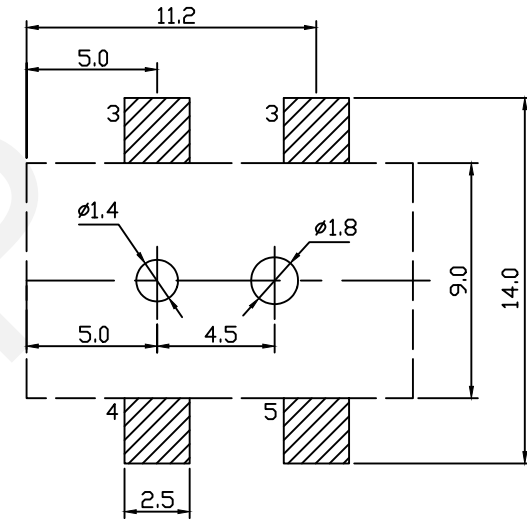


PIN	∅2.0	∅2.5
APPO		

SCHEMATIC



NO	Description	QTY	Material	Plating
1	Housing	1	PA9T	---
2	Cover	1	PA9T	---
3	Curve Piece	1	H62 Brass	Ag-Plating
4	Spring	1	Bronze	Ag-Plating
5	Curve Piece	1	H62 Brass	Ag-Plating
6	PIN	1	H59 Brass	Ni-Plating

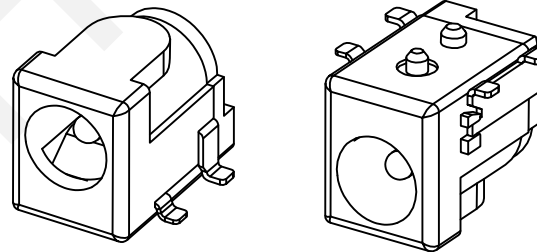

SPECIFICATION

Rated Load:DC 30V 0.5A
 Contact Resistance:30mΩ, Max
 Insulation Resistance:100MΩ, Min
 Withstand Voltage:AC500V
 Actuating Force:3~20N
 Life:5000 Cycles
 Operating Temperature:-30°C~70°C



NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4			SCALE:---
0~3	3~18	18~50	50~120	
±0.12	±0.15	±0.3	±0.5	

DRWN BY PAN
 CHK'D BY FENG
 APPR BY ZHAN

DC POWER Jack SMT HORIZONTAL
 THIRD ANGLE PROJECTION
 RHTAYDC-001