



PIN	$\phi 2.0$	$\phi 2.5$
APPD		

SCHEMATIC



SPECIFICATION


Rated Load:DC 30V 0.5A
 Contact Resistance:30m Ω , Max
 Insulation Resistance:100M Ω , Min
 Withstand Voltage:AC500V
 Actuating Force:3-20N
 Life:5000 Cycles
 Operating Temperature:-30 $^{\circ}$ C-70 $^{\circ}$ C

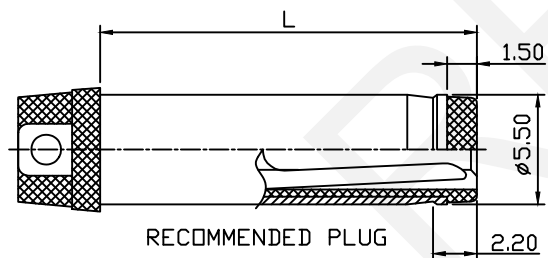

NO	Description	QTY	Material	Plating
1	1#Curve Piece	1	Brass	Sn-Plating
2	2#Curve Piece	1	Brass	Sn-Plating
3	Spring	1	Bronze	Sn-Plating
4	PIN	1	Brass	Ni-Plating
5	Axis Support	1	Brass	Ni-Plating
6	Housing	1	PBT	---

RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4			SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120	CHK'D BY FENG	
± 0.12	± 0.15	± 0.3	± 0.5	APPR BY ZHAN	

DC POWER Jack DIP
 THIRD ANGLE PROJECTION

 RHTAYC-025D