

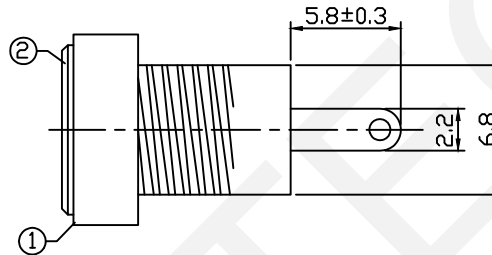


PCB LAYOUT TOP VIEW




SPECIFICATION

Rated Load:DC 30V 0.5A
 Contact Resistance:30mΩ, Max
 Insulation Resistance:100MΩ, Min
 Withstand Voltage:AC500V
 Actuating Force:3-20N
 Life:5000 Cycles
 Operating Temperature:-30°C-70°C

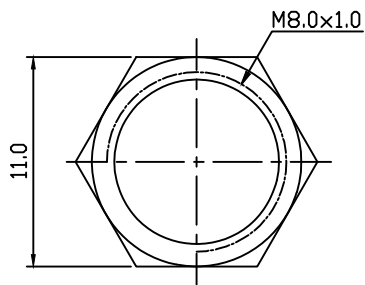

PIN	∅2.0	∅2.5
APPD		




NO	Description	QTY	Material	Plating
1	HouSing	1	PBT	---
2	Axis Support	1	Brass	Ni-Plating
3	PIN	1	Brass	Ni-Plating
4	Contact Foot	1	Brass	Ag-Plating
5	Spring	1	Bronze	Ag-Plating

RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4			SCALE:---
0~3	3~18	18~50	50~120	
±0.12	±0.15	±0.3	±0.5	

DRWN BY PAN
 CHK'D BY FENG
 APPR BY ZHAN

DC POWER Jack DIP



RHTAYC-027