



PCB LAYOUT TOP VIEW

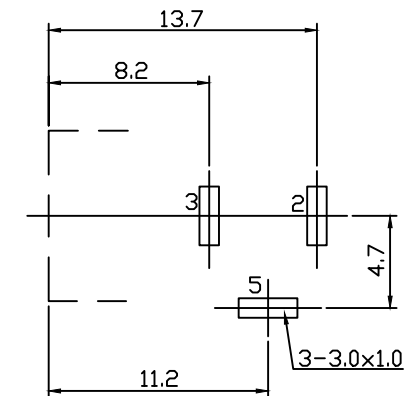

NO	Description	QTY	Material	Plating
1	Housing	1	ABS	---
2	Curve Piece	1	H62 Brass	Cu-Sn-Plating
3	Spring	1	65Mn Steel	Cu-Sn-Plating
4	PIN	1	H59 Brass	Ni-Plating
5	Flat PIECE	1	Brass	Cu-Sn-Plating
6	Cover	1	ABS	---

SCHEMATIC



PIN	Ø2.0	Ø2.5
APPD		

SPECIFICATION

Rated Load:DC 30V 1.0A

Contact Resistance:30mΩ, Max

Insulation Resistance:100MΩ, Min

Withstand Voltage:AC500V

Actuating Force:3~20N

Life:5000 Cycles


Operating Temperature:-30°C~70°C

RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4		SCALE:---		DRWN BY PAN
0~3	3~18	18~50	50~120	CHK'D BY FENG	
±0.12	±0.15	±0.3	±0.5	APPR BY ZHAN	

DC POWER Jack DIP

THIRD ANGLE PROJECTION



RHTAYC-031