

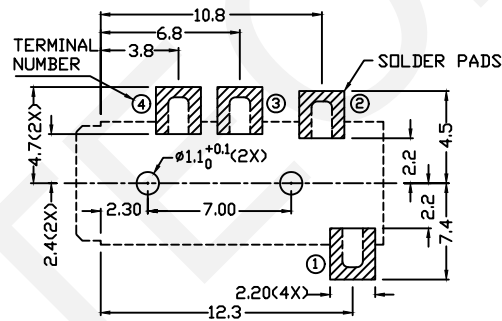



Technical Parameters:  
 Rated Voltage:DC 30V  
 Rated Current: 0.5 A  
 Contact Resistance:0.03Ω,Max  
 Insulation Resistance:100MΩ,Min  
 Pressure:AC500V(50Hz)/1minute  
 Insertion Force:2-20 N  
 Life: 50000 Times  
 Operating Temperature:-30°C~70°C  
 Material:

Terminal1:Copper Alloy  
 Terminal2:Copper Alloy  
 Terminal3:Copper Alloy  
 Terminal4:Copper Alloy  
 Housing:PA6T

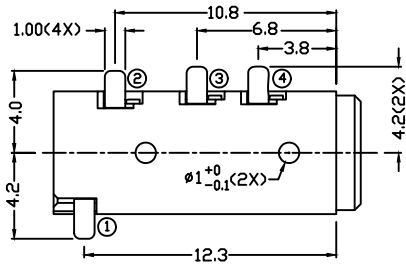

RECOMMENDED  
 SOLDER PAD LAYOUT  
 (TOP VIEW)



MODEL NO	001	001A	001B
SCHMATIC			

ORDER INFORMATION

RHTAYPJ3.5-001A

3.5mm SMD Stereo Jack

Schematic:See Annex

**RHTECP** NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4	SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120
±0.12	±0.15	±0.3	±0.5
			CHK'D BY FENG
			APPR BY ZHAN

SMD Stereo Jack	
THIRD ANGLE PROJECTION	RHTAYPJ3.5-001

