
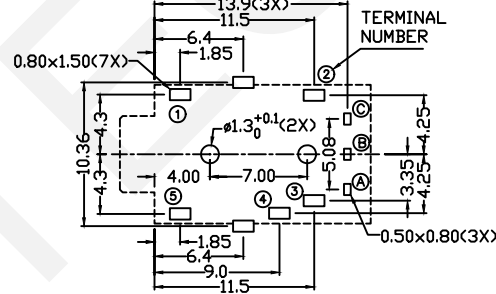




Technical Parameters:  
 Rated Voltage:DC 30V  
 Rated Current: 0.5 A  
 Contact Resistance:0.03Ω,Max  
 Insulation Resistance:100MΩ,Min  
 Pressure:AC500V(50Hz)/1minute  
 Insertion Force:2~20 N  
 Life: 50000 Times  
 Operating Temperature:-30°C~70°C  
 Material:



Terminal 1 : Copper Alloy  
 Terminal 2 : Copper Alloy  
 Terminal 3 : Copper Alloy  
 Terminal 4 : Copper Alloy  
 Terminal 5 : Copper Alloy  
 Shield: Brass  
 Housing-1/2,Cover : PA9T

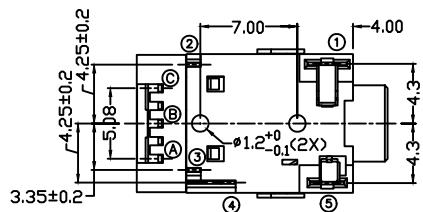

PCB LAYOUT (TOP VIEW)

ORDER INFORMATION  
 RHTAYJ03.5-001

3.5mm Stereo Jack/OPTO

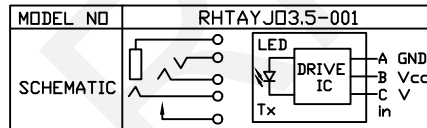

**RHTECP** NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4	SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120
±0.12	±0.15	±0.3	±0.5
			CHK'D BY FENG
			APPR BY ZHAN

Stereo Jack/OPTO  
 THIRD ANGLE PROJECTION  
 RHTAYJ03.5-001