
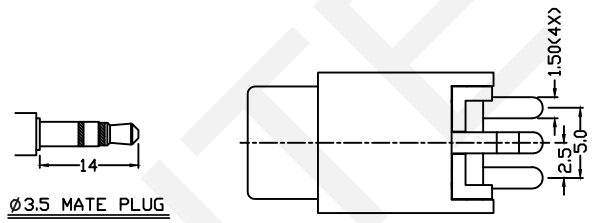


Technical Parameters:
 Rated Voltage:DC 30V
 Rated Current: 0.5 A
 Contact Resistance:0.03Ω,Max
 Insulation Resistance:100MΩ,Min
 Pressure:AC500V<50Hz>/1minute
 Insertion Force:2-20 N
 Life: 50000 Times
 Operating Temperature:-30°C~70°C
 Material:
 Housing/Cover : PBT
 Center Pin Material:
 Terminal 1,2: Copper Alloy
 Terminal 3,10/Bushing :Brass

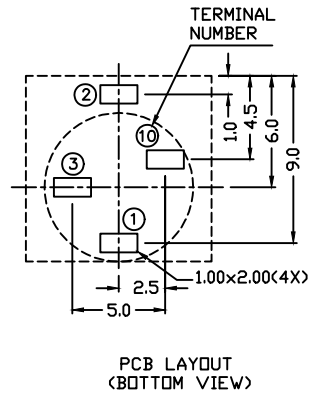

MODEL NO	004B	004BA	004BB
SCHEMATIC			

ORDER INFORMATION
RHTAYSJ3.5-004BA
 3.5mm Dip Stereo Jack
 Schematic:See Annex

RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4	SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120
±0.12	±0.15	±0.3	±0.5
			CHK'D BY FENG
			APPR BY ZHAN

Dip Stereo Jack
 THIRD ANGLE PROJECTION

 RHTAYSJ3.5-004B