


SCHMATIC

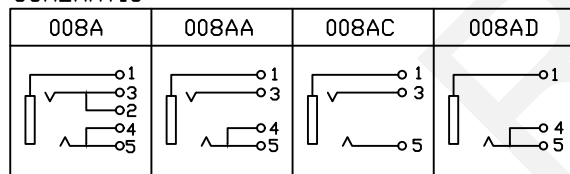

Material:

- 1.Flat Piece:H62 Brass,Ag-Plating
- 2.Curve Piece:H62 Brass,Ag-Plating
- 3.Spring Piece:Phosphor Bronze,Ag-Plating
- 4.Curve Piece:H62 Brass,Ag-Plating
- 5.Spring Piece:Phosphor Bronze,Ag-Plating
- 6.Axis Support:H59 Brass,Ni-Plating
- 7.Cover:PBT8.Housing-PBT

Specification:

- 1.Rating:DC 50V 0.5A
- 2.Contact Resistance: $\leq 0.03\Omega$
- 3.Insulation Resistance: $\geq 100M\Omega$ (DC250V)
- 4.Withstand Voltage:500VAC
- 5.Insertion And Extraction Force:3-20N
- 6.Life Test:5,000 Cycles
- 7.Colour:G=Green




NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4	SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120
±0.12	±0.15	±0.3	±0.5

CHK'D BY FENG
APPR BY ZHAN

3.5mm Stereo Phone Jack For PCB Mount

THIRD ANGLE PROJECTION



RHTAYSJ3.5-008A-G