


Ø3.5 MATE PLUG

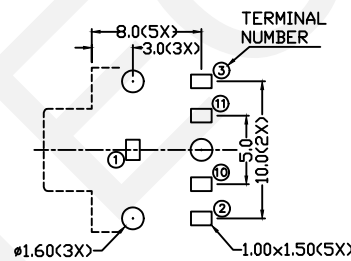

PCB LAYOUT (TOP VIEW)

Technical Parameters:
 Rated Voltage:DC 30V
 Rated Current: 0.5 A
 Contact Resistance:0.03Ω,Max
 Insulation Resistance:100MΩ,Min
 Pressure:AC500V(50Hz)/1minute
 Insertion Force:2-20 N
 Life: 50000 Times
 Operating Temperature:-30°C~70°C
 Material:
 Terminal 1 : Cold Rolled Steel
 Terminal 2 : Copper Alloy
 Terminal 3 : Copper Alloy
 Terminal 10: Brass
 Terminal 11: Brass
 Bushing: Brass
 Spring: Copper Alloy
 Housing: PBT
 Cover: PTB

ORDER INFORMATION

RHTAYSJ3.5-003A A

3.5mm Dip Stereo Jack

A:With NUT

B:Without NUT

Schematic:See Annex

With NUT	M6X0.5	MODEL NO	003A	003AA	003AB	003AC	003AD
D DIA		SCHEMATIC					

RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4	SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120
±0.12	±0.15	±0.3	±0.5

CHK'D BY FENG
APPR BY ZHAN

Dip Stereo Jack	
THIRD ANGLE PROJECTION	RHTAYSJ3.5-003A