

1 2 3 4 5 6 7 8 9

A

A

B

B

C

C

D


D

E

E

F

F

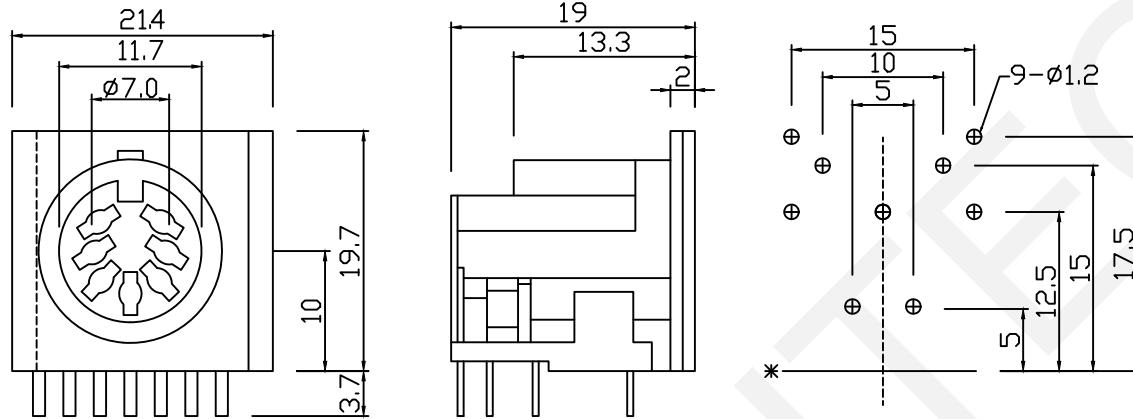

MATERIAL

Insulator: PBT UL94V-0 Or PPS
 Shell: Brass, Nickel/Tin Plated Or Tin Plated
 Contact: Phosphor Bronze, Gold/Tin plated
ENVIRONMENTAL

Operating Temperature: -25°C~+70°C

ELECTRICAL

Contact Current Rating: 1 Amp 100VAC
 2 Amp 12VDC
 Dielectric Withstanding: AC 1000V/min.
 Insulation Resistance: 5000M OHM min AT 500V DC
 Contact Resistance: 30m ohm Max.
 Insertion force: 4.5Kgf Max
 Withdrawal Force: 0.8Kgf Min
 Life: 5000 Cycles

ORDER INFORMATION

Product NO.: RHTAY91A-4 B

DIN JACK With Shell Series

Pin Number


- 3 3P 4 4P 5 5P
- 6 6P 7 7P 8 8P 13 13P
- Color : B=Black

RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4			SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120	CHK'D BY FENG	
±0.12	±0.15	±0.3	±0.5	APPR BY ZHAN	

DIN Jack Without Shell Series

THIRD ANGLE PROJECTION



RHTAY91A-4B

1 2 3 4 5 6 7 8 9

G

G

MATERIAL

Insulator: PBT UL94V-0 Or PPS

Shell: Brass, Nickel/Tin Plated Or Tin Plated

Contact: Phosphor Bronze, Gold/Tin plated

ENVIRONMENTAL

Operating Temperature: -25°C~+70°C

ELECTRICAL

Contact Current Rating: 1 Amp 100VAC

2 Amp 12VDC

Dielectric Withstanding: AC 1000V/min.

Insulation Resistance: 5000M OHM min AT 500V DC

Contact Resistance: 30m ohm Max.

Insertion force: 4.5Kgf Max

Withdrawal Force: 0.8Kgf Min

Life: 5000 Cycles

ORDER INFORMATION

Product NO.: RHTAY91L-4 B



DIN JACK With Shell Series

Pin Number _____

3 3P 4 4P 5 5P

6 6P 7 7P 8 8P 13 13P

Color : B=Black _____

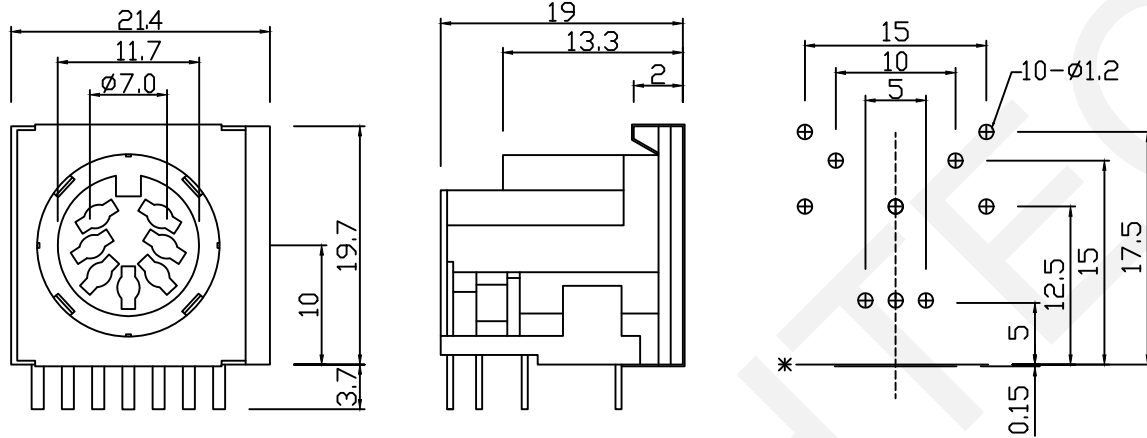

RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4			SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120	CHK'D BY FENG	
±0.12	±0.15	±0.3	±0.5	APPR BY ZHAN	

DIN Jack Without Shell Series	
THIRD ANGLE PROJECTION	RHTAY91L-4B

