

Electrical Specification:

Contact Resistance : 30mΩ Max

Insulation Resistance : 50MΩ Min at DC 500V

Withstand Voltage : AC 500V(50Hz) 1min


Operating Temperature : -25°C~+85°C

Materials:



Housing : PBT UL94V~0

Terminal 1 : C.R.Steel

Terminal 4 : Brass



RCA MATE PLUG

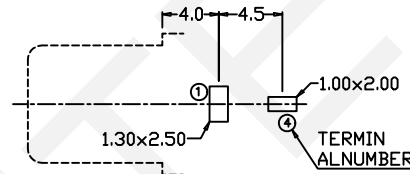

PCB LAYOUT  
(BOTTOM MEW)

Order Information:

RHTAYCA-102-N-R

RCA Jack Type

N:Nickel Plated

Color: R:Red

B:Black Y:Yellow W:White


MODEL NO.	102
SCHEMATIC	

NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4			SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120	CHK'D BY FENG	
±0.12	±0.15	±0.3	±0.5	APPR BY ZHAN	

RCA Jack PCB Mount Right Angle

THIRD ANGLE PROJECTION



RHTAYCA-102