


Electrical Specification:
 Number Of Contacts: 3
 Contact Resistance: ≤ 3 m Ω ms
 Insulation Resistance Initial: > 2 G Ω hms
 After Damp Heat Test: > 1 G Ω hms
 Dielectric Strength: 1500 V dc
 Rated Current: 16 A
 Mechanical Lifetime: > 1000 Cycles
 Insertion/Withdrawal Force: ≤ 20 N
 Cable O.D. Range: 4.0 mm - 8.0 mm
 Temperature Range: -30°C to +80°C



Order Information:
 RHTAYLR-P08-03-F-B


XLR Jack Series.┘
 03=3PIN of 03~07PIN┘
 F=Female M=Male┘
 R=Red B=Black W=White┘

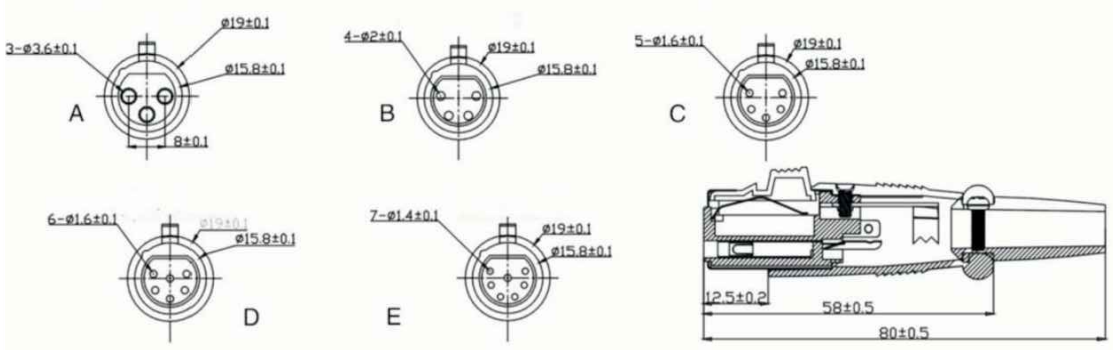

NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4			SCALE:---
0~3	3~18	18~50	50~120	
±0.12	±0.15	±0.3	±0.5	

DRWN BY PAN
 CHK'D BY FENG
 APPR BY ZHAN



XLR Plug
 RHTAYLR-P08