


Electrical Specification:  
 Number Of Contacts: 3  
 Contact Resistance:  $\leq 3$  mΩms  
 Insulation Resistance Initial:  $> 2$  GΩhms  
 After Damp Heat Test:  $> 1$  GΩhms  
 Dielectric Strength: 1500 V dc  
 Rated Current: 16 A  
 Mechanical Lifetime:  $> 1000$  Cycles  
 Insertion/Withdrawal Force:  $\leq 20$ N  
 Cable O.D. Range: 4.0mm-8.0mm  
 Temperature Range:  $-30^{\circ}\text{C}$  to  $+80^{\circ}\text{C}$



Order Information:  
RHTAYLR-P10-03-F-B  
 XLR Jack Series.  
 03=3PIN of 03~07PIN  
 F=Female M=Male  
 R=Red B=Black W=White

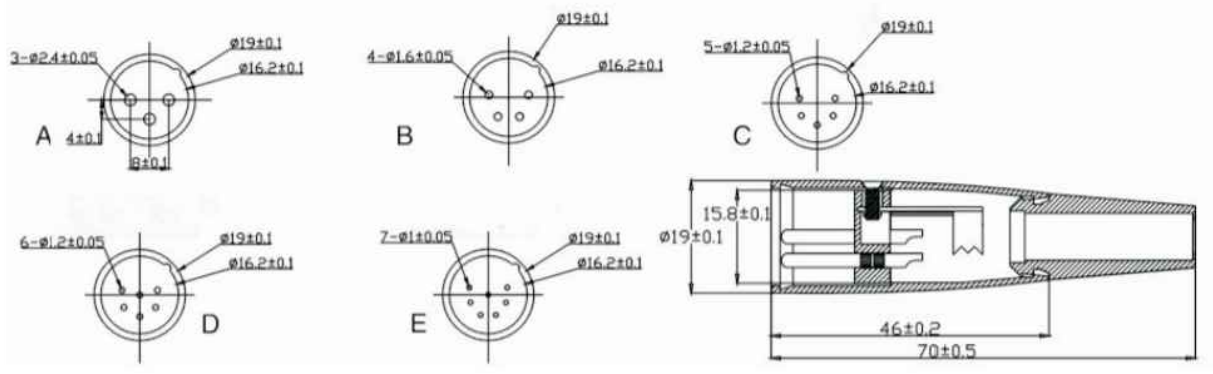

NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4			SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120	CHK'D BY FENG	THIRD ANGLE PROJECTION 
±0.12	±0.15	±0.3	±0.5	APPR BY ZHAN	

XLR Plug  
 RHTAYLR-P10