

Electrical Specification:

Number of Contacts: 3

Contact Resistance:  $\leq 3$  mOhms

Insulation Resistance Initial:  $> 2$  GOhms

After Damp Heat Test:  $> 1$  GOhms

Dielectric Strength: 1500 V dc


Rated Current: 16 A

Mechanical Lifetime:  $> 1000$  Cycles

Insertion/Withdrawal Force:  $\leq 20$ N

Cable D.D. Range: 4.0mm-8.0mm

Temperature Range:  $-30^{\circ}\text{C}$  to  $+80^{\circ}\text{C}$

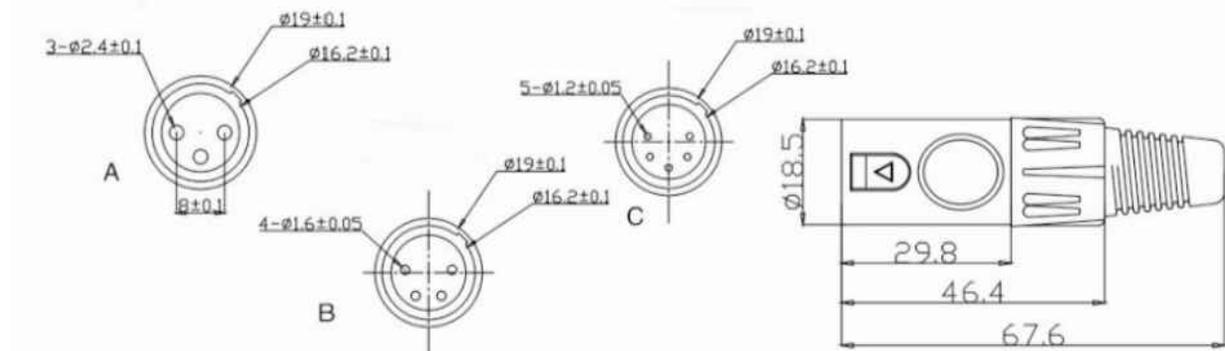

Order Information:

RHTAYLR-P11-03-F-B

XLR Jack Series

03=3PIN of 03~07PIN

F=Female M=Male

R=Red B=Black W=White

**RHTECP** NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4			SCALE:---
0~3	3~18	18~50	50~120	
$\pm 0.12$	$\pm 0.15$	$\pm 0.3$	$\pm 0.5$	

DRWN BY PAN  
CHK'D BY FENG  
APPR BY ZHAN



XLR Plug

RHTAYLR-P11