

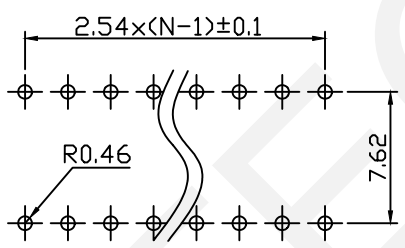


Switching Characteristics:
 Mechanical Life: 2000 Operations Per Switch
 Operation Force :≤9.8N Max.
 Stroke: 2.0mm
 Operation Temp:-20°C~+70°C
 Electrical Life: 2000 Operations Per Switch-24 VDC 25mA
 Contact Resistance: 50m Max. At Initial
 Non-Switching Rating:100mA,50VDC
 Switching Rating:25mA, 24VDC
 Circuit: Single Pole Single Throw
 Contact:Half Gold/Sn

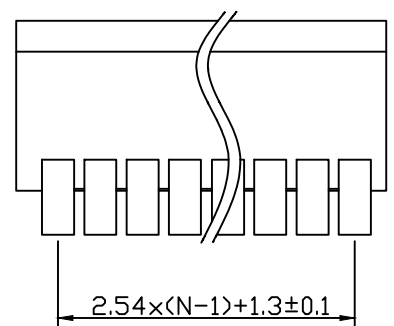

PCB Layout

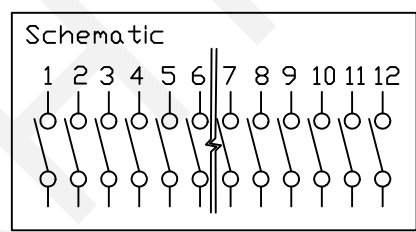

| Model No. | No.Pos | A |
|------------|--------|-------|
| RHTGYPT-01 | 1 | 4.10 |
| RHTGYPT-02 | 2 | 6.64 |
| RHTGYPT-03 | 3 | 9.18 |
| RHTGYPT-04 | 4 | 11.72 |
| RHTGYPT-05 | 5 | 14.26 |
| RHTGYPT-06 | 6 | 16.80 |
| RHTGYPT-07 | 7 | 19.34 |
| RHTGYPT-08 | 8 | 21.88 |
| RHTGYPT-09 | 9 | 24.42 |
| RHTGYPT-10 | 10 | 26.96 |
| RHTGYPT-12 | 12 | 32.04 |

Order Information
 RHTGYPT-XX-X-X-X
 Dip Switch
 Number of Pos.: 01~12Pos.
 Color:R=Red,B=Blue,N=Black
 0:Non-Sealed 1:With Sealed
 Packaging: 0=Tube 1=Tape

Soldering And Cleaning Processes Keep All Switch Contacts In Their "OFF" Position For All Operations



NINGBO RHT ELECTRONIC CO.,LTD

| | | | | |
|----------|----------------|-------|-----------|---------------|
| UNITS:mm | SHEET SIZE: A4 | | SCALE:--- | DRWN BY PAN |
| 0~3 | 3~18 | 18~50 | 50~120 | CHK'D BY FENG |
| ±0.12 | ±0.15 | ±0.3 | ±0.5 | APPR BY ZHAN |

Dip Switch Pitch 2.54mm,
 Bulge Handle Type,RoHS
 THIRD ANGLE PROJECTION
 RHTGYPT