



1 2 3 4 5 6 7 8 9

A

A

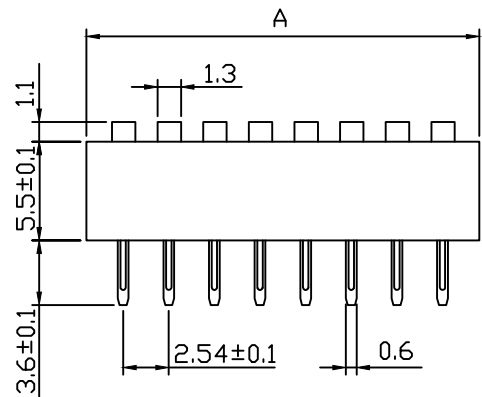


Material:
 Cover: PBT Plastic (Red Or Blue)
 Base: PBT Plastic (Black)
 Operator: Pom Plastic (White)
 Stock: Epoxy Resin Potting
 Terminal: Tin Plated Phosphor Bronze,
 Half Gold/Sn
 Sealing Tape: Polyimide KAPTON
 Switching Characteristics:
 Switch Capacity: 25mA At 24VDC
 Insulation Resistance: 100MΩ At 250VDC
 Contact Resistance: 50mΩ max.
 Insulation Strength: 500VAC/1min
 Operation Force :1000gf Max.
 Electrical Life: 2000 times
 Operation Temp:-20°C~+70°C

B

B


C

C

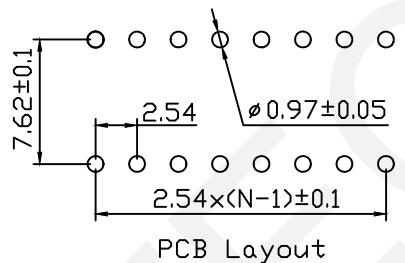

D

D

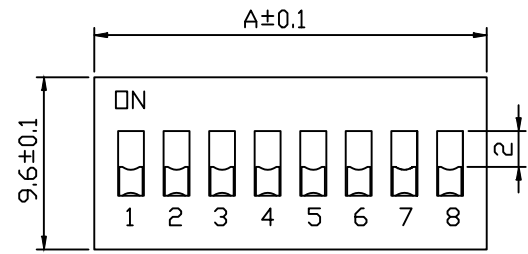


Order Information
RHTGYST-08-R-0 0
 Packaging: 0=Tube;1=Tape
 0:Non-Sealed ;1:With Sealed
 Color:R=Red,B=Blue,N=Black
 Number Of Pos(01~12)
 Bulge Type Dip Switch

Model No	No. Pos.	A
RHTGYST-01	1	4.10
RHTGYST-02	2	6.64
RHTGYST-03	3	9.18
RHTGYST-04	4	11.72
RHTGYST-05	5	14.26
RHTGYST-06	6	16.80
RHTGYST-07	7	19.34
RHTGYST-08	8	21.88
RHTGYST-09	9	24.42
RHTGYST-10	10	26.96
RHTGYST-12	12	32.04

E

E

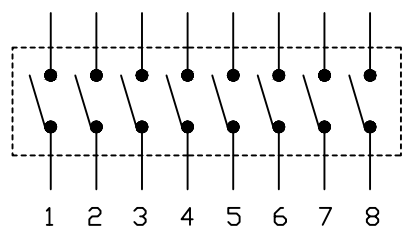

Manual Welding: 320 Degrees C No More Than 2 Seconds.(30 Watt Iron Max.)
 Wave Soldering: 260 Degrees C No More Than 5 Seconds, In The Welding And Cleaning Process Switch Is Open State

F

F

G

G



NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4	SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120
±0.12	±0.15	±0.3	±0.5
CHK'D BY FENG		APPR BY ZHAN	

SPST Standary Slide Type Half Gold/Sn
 THIRD ANGLE PROJECTION
 RHTGYST

1 2 3 4 5 6 7 8 9