


PCB Layout

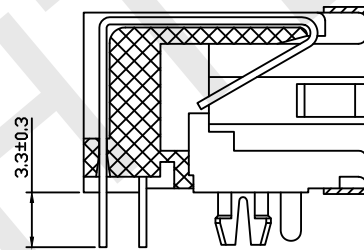

SECTION A-A

Material:

Housing: PBT+Glass Filled Polyester

Flammability Rating : UL94 V-0

Contacts: Phosphor Bronze Ø0.46

Plating: Gold Plating

Shield: Brass, Tin Plating

Electrical:

Voltage Rating: 125VAC

Current Rating: 1.5A

Contact Resistance: 30mΩ Max.

Insulation Resistance: 500MΩ Min.

Dielectric Strength: 1000VAC Rms 50Hz, 1 Min.

Durability: 600 cycles Min.

Operation Temperature: -40°C ~ +70°C

Order Information

RHTLY57-8P8C-H-XX

Contacts: 8P8C-

H: HALF SHIELD

Plating Code:

01-1u" Gold Plating

02-3u" Gold Plating

03-6u" Gold Plating

04-15u" Gold Plating


05-30u" Gold Plating

 NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4		SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120	CHK'D BY FENG
±0.12	±0.15	±0.3	±0.5	APPR BY ZHAN

RJ45-8P8C Modular jacks, with HALF SHIELD

THIRD ANGLE PROJECTION



RHTLY39-8P8C-H-XX