


P.C.B. LAYOUT

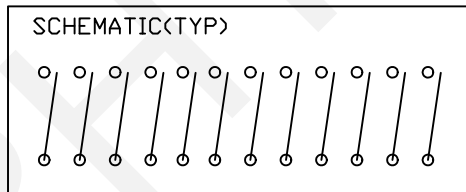

Specifications

Contact Rating: 25 mA at 24VDC(Switching)  
100 mA at 50VDC(Steady State)

Life: 1,000 Cycles

Contact Resistance: 100mΩ Max.

Insulation Resistance:100MΩ At 100VDC Min

Dielectric Strength: 300VAC Min

Storage Temperature: -40°C~85°C

Operating Temperature:-40°C to 85°C.

Operation Force :8N Max.

Materials

Base&Cover: PPS (UL94V-0)

Actuator: PA46 (UL94V-0).

Contacts: Brass, Gold/Tin Plate

Terminals: Brass, Gold/Tin Plate

Order Information

RHTGYL-XX-N-0 0

Recessed Type Dip Switch

Number of Pos.:02~10Pos.

Color:N=Black

0:Non-Sealed

Packaging: 0=Tube 1= Tape


**RHTECP** NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4	SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120
±0.12	±0.15	±0.3	±0.5

CHK'D BY FENG  
APPR BY ZHAN

End-stackable SMT Type DIP Switch

THIRD ANGLE PROJECTION



RHTGYL