


P.C.B. LAYOUT

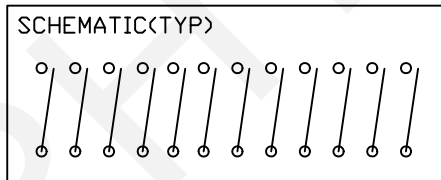

Specifications

Contact Rating: 25 mA at 24VDC(Switching)
 100 mA at 50VDC(Steady State)
 Life: 1,000 Cycles
 Contact Resistance: 100mΩ Max.
 Insulation Resistance:100MΩ At 100VDC Min
 Dielectric Strength: 300VAC Min
 Storage Temperature: -40°C~85°C
 Operating Temperature:-40°C to 85°C.
 Operation Force :8N Max.

Materials

Base&Cover: PPS (UL94V-0)
 Actuator: PA46 (UL94V-0).
 Contacts: Brass, Gold/Tin Plate
 Terminals: Brass, Gold/Tin Plate
 Mylar: 0.05mm UL94V-0 Mylar

Order Information

RHTGYLR-XX-N-0 0

Recessed Type Dip Switch

Number of Pos.:02~10Pos.

Color:N=Black

0:Non-Sealed

Packaging: 0=Tube 1=Tape

RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4		SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120	CHK'D BY FENG
±0.12	±0.15	±0.3	±0.5	APPR BY ZHAN

End-stackable SMT Type DIP Switch

THIRD ANGLE PROJECTION



RHTGYLR