


PCB Layout

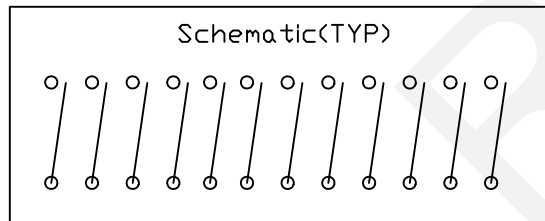

Materials

Base&Cover: PPS (UL94V-0)

Actuator: PA46 (UL94V-0).

Contacts: Brass, Gold/Tin Plate

Terminals: Brass, Gold/Tin Plate

Specifications

Contact Rating: 25 mA at 24VDC(Switching)

100 mA at 50VDC(Steady State)

Life: 1,000 Cycles

Contact Resistance: 100mΩ Max.

Insulation Resistance: 100MΩ At 100VDC Min

Dielectric Strength: 300VAC Min

Storage Temperature: -40°C~85°C

Operating Temperature: -40°C to 85°C.

Operation Force : 9.8N Max.

Order Information

RHTGYMR-XX-N-X-X

2.54mm End Stackable

Through Hole Recessed Type

Number of Pos.: 01~12Pos.

Color Code: N-Black

0: Non-Sealed 1: With Sealed


Packaging: 0=Tube 1=Tape

RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4	SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120
±0.12	±0.15	±0.3	±0.5

CHK'D BY FENG
APPR BY ZHAN

2.54mm End Stackable
Through Hole Recessed Type



RHTGYMR