

Specifications

Contact Rating: 25 mA at 24VDC(Switching)
 100 mA at 50VDC(Steady State)
 Life: 1,000 Cycles
 Contact Resistance: 100mΩ Max.
 Insulation Resistance: 100MΩ At 100VDC Min
 Dielectric Strength: 300VAC Min
 Storage Temperature: -40°C~85°C
 Operating Temperature: -40°C to 85°C.
 Operation Force : 9.8N Max.

Materials

Base&Cover: PPS (UL94V-0)
 Actuator: PA46 (UL94V-0).
 Contacts: Brass, Gold/Tin Plate
 Terminals: Brass, Gold/Tin Plate
 Mylar: 0.05mm UL94V-0 Mylar

Order Information

RHTGYPR-XX-N-1 0

1.27mm Half Pitch Dip Switch
 Number Of Pos.: 02~10Pos.
 Color: N=Black
 1: With Sealed
 Packaging: 0=Tube 1=Tape


RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4			SCALE:---
0~3	3~18	18~50	50~120	
±0.12	±0.15	±0.3	±0.5	

DRWN BY PAN
 CHK'D BY FENG
 APPR BY ZHAN


1.27mm Half Pitch DIP Switch Series
 THIRD ANGLE PROJECTION

 RHTGYPR

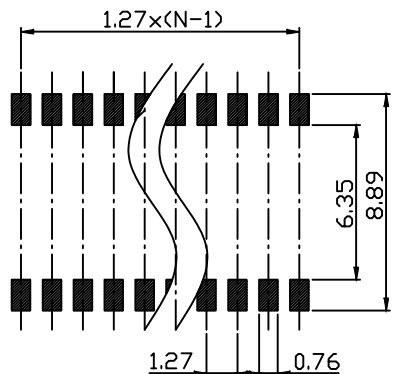


RECOMMENDED P.C.B. LAYOUT
(TOP VIEW)


[Schematic]

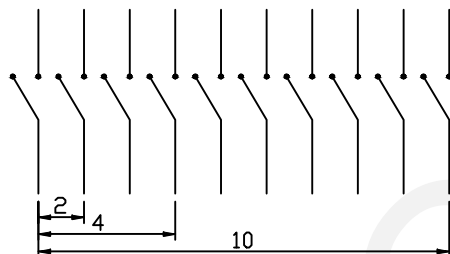

Order Information

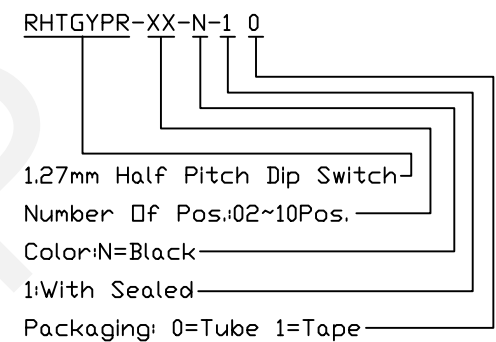

(Construction)

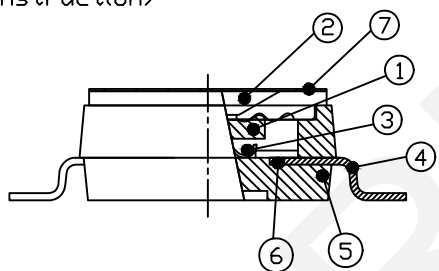

Number	Part Name	Material	Finished
①	Actuator	UL94V0	White
②	Cover	UL94V0	Black
③	Movable	Beryllium Copper	3μ" Gold
④	Terminal	Brass	1μ" Gold
⑤	Base	UL94V0	Black
⑥	Terminal Contact	Brass	3μ" Gold
⑦	Mylar	UL94V0	0.05mm

RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4			SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120	CHK'D BY FENG	
±0.12	±0.15	±0.3	±0.5	APPR BY ZHAN	

1.27mm Half Pitch DIP Switch Series

THIRD ANGLE PROJECTION

RHTGYPR