

ORDER INFORMATION

RHTGYS03- 1 2 D 02 - X X - X

Slide Switch Type \_\_\_\_\_


Pole \_\_\_\_\_

Throw \_\_\_\_\_

Travelling					
C	D	E	F	G	H
1.5	2.0	2.5	3.0	3.5	4.0
I	J	K	L	N	P
4.5	5.0	5.5	6.0	7.0	8.0


Sequential No. \_\_\_\_\_

Knob Type



Knobe Height \_\_\_\_\_

Operating Force \_\_\_\_\_

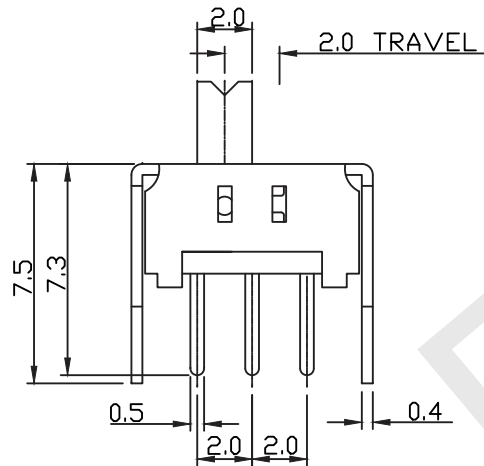

SPECIFICATIONS

Rating: 0.3A 50VDC

Contact Resistance: 50MΩ max

Insulation Resistance: 500VDC 100MΩ Min

Dielectric Strength: 100V AC 1 Minute

Operating Force: 100gf~800gf

Electrical Life: 10,000 cycles

**RHTECP** NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4			SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120	CHK'D BY FENG	THIRD ANGLE PROJECTION 
±0.12	±0.15	±0.3	±0.5	APPR BY ZHAN	

(1P2T) Slide Switch Series

RHTGYS03-12D02