

SCHEMATIC

ORDER INFORMATION

RHTGYS36 - 2 2 H 05 - X X - X

Slide Switch Type _____

Pole _____

Throw _____


| Travelling | | | | | |
|------------|-----|-----|-----|-----|-----|
| C | D | E | F | G | H |
| 1.5 | 2.0 | 2.5 | 3.0 | 3.5 | 4.0 |
| I | J | K | L | N | P |
| 4.5 | 5.0 | 5.5 | 6.0 | 7.0 | 8.0 |

Sequential No. _____

| Knob Type | | | | | |
|-----------|---|----|----|----|----|
| | | | | | |
| RG | G | TG | VG | EG | CG |

Knobe Height _____

Operating Force _____

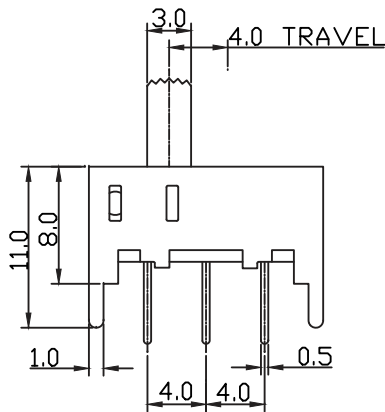

SPECIFICATIONS

Rating:0.3A 50VDC

Contact Resistance: 30mΩ Max

Insulation Resistance:500VDC 100MΩ Min

Dielectric Strength:500V AC 1 Minute

Operating Force:100gf~800gf

Electrical Life:10,000 cycles

| | | | | | |
|----------|----------------|-------|--------|---------------|-------------|
| UNITS:mm | SHEET SIZE: A4 | | | SCALE:--- | DRWN BY PAN |
| 0~3 | 3~18 | 18~50 | 50~120 | CHK'D BY FENG | |
| ±0.12 | ±0.15 | ±0.3 | ±0.5 | APPR BY ZHAN | |

| | |
|----------------------------|----------------|
| (2P2T) Slide Switch Series | |
| THIRD ANGLE PROJECTION | RHTGYS36-22H05 |