

Material:
 Housing: PBT+Glass Filled Polyester
 Flammability Rating : UL94V-0
 Contacts: Phosphor Bronze Ø0.46mm
 Plating: Gold Plating
 Shield: Brass, Tin Plating



Electrical:
 Voltage Rating: 125VAC
 Current Rating: 1.5A
 Contact Resistance: 30mΩ Max.
 Insulation Resistance: 500MΩ Min.
 Dielectric Strength: 1000VAC Rms 50Hz, 1 Min.
 Durability: 600 cycles Min.
 Operation Temperature: -40°C~+70°C

Order Information

RHTLY09B-8P8C-W - G/Y-XX

Contacts: 8P8C
 Shield: W-with Shield
 LED Code: LEFT/RIGHT
 G/Y-Green/Yellow
 Y/G-Yellow/Green

Plating Code:
 01-Fu" Gold Plating
 02-3u" Gold Plating
 03-6u" Gold Plating
 04-15u" Gold Plating
 05-30u" Gold Plating

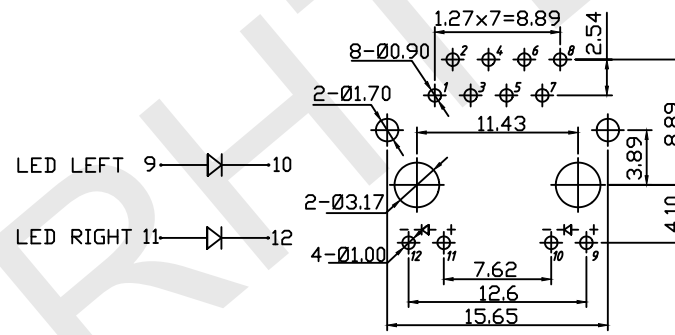

PCB Layout