

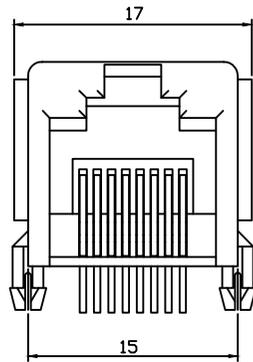



Without Panel



With Panel



PCB Layout

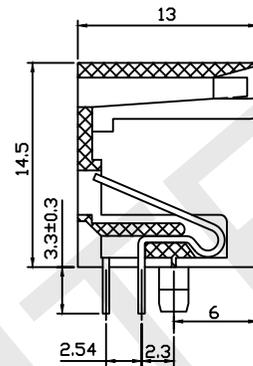

SECTION A-A

Material:
 Housing:PBT+Glass Filled Polyester
 Flammability Rating :UL94V-0
 Contacts: Phosphor Bronze 0.46mm
 Plating:Gold Plating

Electrical:
 Voltage Rating:125VAC
 Current Rating:1.5A
 Contact Resistance:30mΩ Max.
 Insulation Resistance: 500MΩ Min.
 Dielectric Strength:1000VAC Rms 50Hz, 1 Min.
 Durability:600 cycles Min.
 Operation Temperature:-40℃+70℃

Order Information

RHTLY33-8P8C- W 1 - XX
 Contacts:8P8C
 Panel:W-With Panel
 W/0-Without Panel
 Color Code:
 1-Black 2-Gray
 Plating Code:
 01-Fu" Gold Plating
 02-3u" Gold Plating
 03-6u" Gold Plating
 04-15u" Gold Plating
 05-30u" Gold Plating

RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4		SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120	CHK'D BY FENG
±0.12	±0.15	±0.3	±0.5	APPR BY ZHAN

RJ45-8P8C Modular jacks	
THIRD ANGLE PROJECTION	RHTLY33-8P8C-X-X-XX