

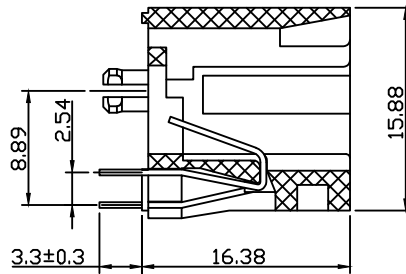



With Panel



SECTION A-A



Without Panel



PCB Layout

Material:
 Housing:PBT+Glass Filled Polyester
 Flammability Rating:UL94V-0
 Contacts: Phosphor Bronze Ø0.46mm
 Plating:Gold Plating

Electrical:
 Voltage Rating:125VAC
 Current Rating:1.5A
 Contact Resistance:30mΩ Max.
 Insulation Resistance: 500MΩ Min.
 Dielectric Strength:1000VAC Rms 50Hz,1 Min.
 Durability:600 cycles Min.
 Operation Temperature:-40℃+70℃

Order Information

RHTLY54-6P6C-X-X-1-XX


Contacts:6P6C
 Panel W-with Panel
 W/D without Panel
 Peg Code: L-LPeg S-Split Peg
 Color Code:1-Black
 Plating Code:
 01-Fu" Gold Plating
 02-3u" Gold Plating
 03-6u" Gold Plating
 04-15u" Gold Plating
 05-30u" Gold Plating

RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4			SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120	CHK'D BY FENG	
±0.12	±0.15	±0.3	±0.5	APPR BY ZHAN	

RJ12-6P6C Vertical Modular jacks,Black

THIRD ANGLE PROJECTION



RHTLY54-6P6C-X-X-1-XX