

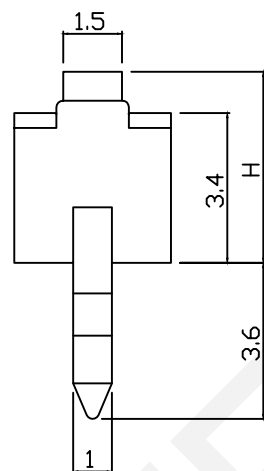
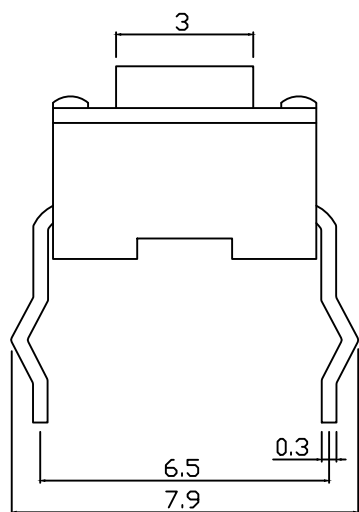


Dimension (unit: mm)



H
4.3
5.0

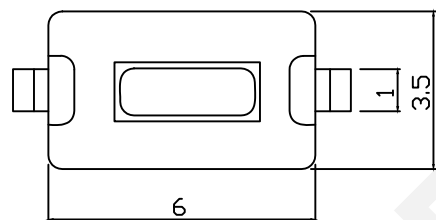

PCB LAYOUT

ELECTRICAL

1. Rating: 50mA 12VDC
2. Contact Resistance: $\leq 50\text{m}\Omega$ max (Initial)
3. Insulation Resistance: $100\text{M}\Omega$ min DC 250V
4. Dielectric Strength: AC 250V (50/60Hz For 1 minute)
5. Electrically Life: 100000 Cycles
6. Environment Temperature: $-30^{\circ}\text{C} \sim +120^{\circ}\text{C}$
7. Operating Force: 180/250 ($\pm 30\text{gf}$)
8. Seal Temperature: $260^{\circ}\text{C} \sim 280^{\circ}\text{C}$

ORDER INFORMATION

RHTGYS3601-4.3-180

Series No

Height: 4.3mm/5.0mm

Operating Force: 180~250gf


RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4	SCALE:----	DRWN BY PAN
0~3	3~18	18~50	50~120
± 0.12	± 0.15	± 0.3	± 0.5

CHK'D BY FENG
APPR BY ZHAN

3x6mm Tact Switch Series

THIRD ANGLE PROJECTION



RHTGY3601