

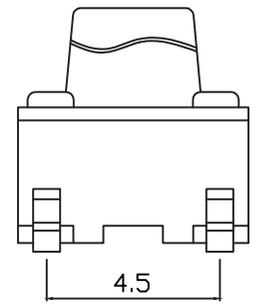
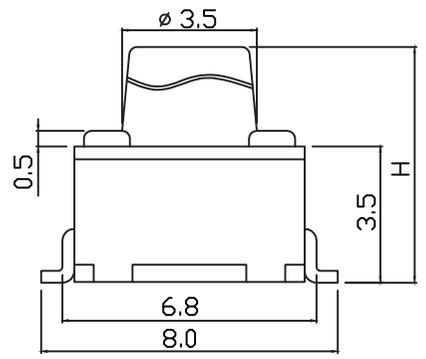


Dimension (unit: mm)

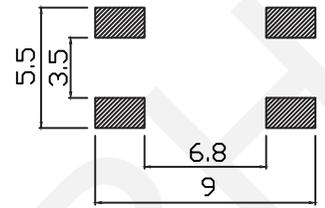

H
4.3
5.0
6.0
7.0
8.0

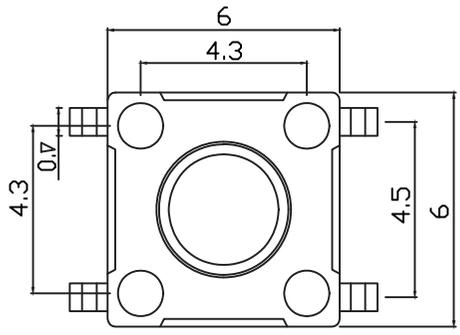

PCB LAYOUT

ELECTRICAL

1. Rating: 50mA 12V DC
2. Contact Resistance:  $\leq 50m\Omega$  Max (Initial)
3. Insulation Resistance:  $\geq 100M\Omega$  (Min DC 250V)
4. Dielectric Strength: AC 250V (50/60Hz For 1minute)
5. Electrically Life: 100000 Cycles
6. Environment Temperature:  $-20^{\circ}C \sim +70^{\circ}C$
7. Operating Force: 180/250 ( $\pm 30gf$ )
8. Seal Temperature:  $260^{\circ}C \sim 280^{\circ}C$

ORDER INFORMATION

RHTGYS6604-4.3-180-T

Series No:


Height: 4.3mm/5.0mm/6.0mm/7.0mm/8.0mm



Operating Force: 180~250gf

Packing: B=Bulk T=Tape

**RHTECP** NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4		SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120	CHK'D BY FENG
$\pm 0.12$	$\pm 0.15$	$\pm 0.3$	$\pm 0.5$	APPR BY ZHAN



6x6 Tact Switch Series  
 THIRD ANGLE PROJECTION  
  
 RHTGYS6604

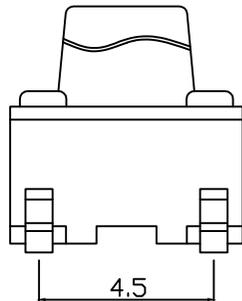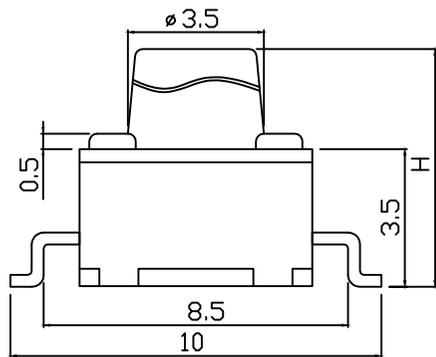

H
4.3
5.0
6.0
7.0
8.0

**ELECTRICAL**

1. Rating: 50mA 12V DC
2. Contact Resistance:  $\leq 50m\Omega$  Max (Initial)
3. Insulation Resistance:  $\geq 100M\Omega$  (Min DC 250V)
4. Dielectric Strength: AC 250V (50/60Hz For 1minute)
5. Electrically Life: 100000 Cycles
6. Environment Temperature:  $-20^{\circ}C \sim +70^{\circ}C$
7. Operating Force: 180/250 ( $\pm 30gf$ )
8. Seal Temperature:  $260^{\circ}C \sim 280^{\circ}C$

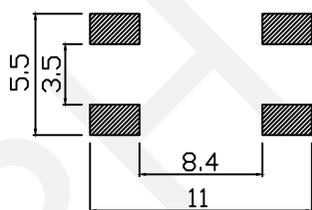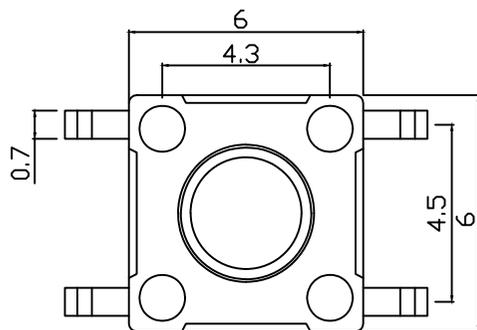

PCB LAYOUT

**ORDER INFORMATION**

RHTGYS6604B-4.3-180-T

Series No: \_\_\_\_\_

Height: 4.3mm/5.0mm/6.0mm/7.0mm/8.0mm

Operating Force: 180~250gf

Packing: B=Bulk T=Tape

**RHTECP** NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4			SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120	CHK'D BY FENG	THIRD ANGLE PROJECTION 
$\pm 0.12$	$\pm 0.15$	$\pm 0.3$	$\pm 0.5$	APPR BY ZHAN	

6x6 Tact Switch Series

RHTGYS6604B