

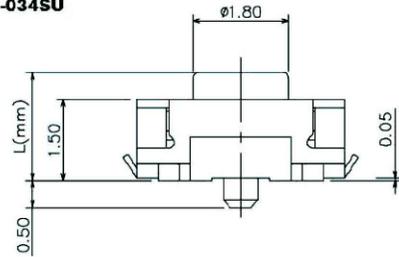




-034SU



-034SUA

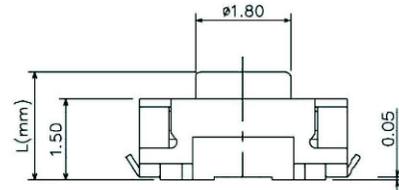

Characteristics:

Rating:DC12V 50mA

Travel:0.20±0.1mm

Operating Force:160~260±50gf

Contact Resistance:100mΩ Max.

Life:50000~100000 Cycles Min.

Operating Temperature Range:-20℃~70℃

ORDER INFORMATION

RHTGYS0304-2.0-160-T

Part Number

Shank Size

Operating Force :160~260gf

T-SMD Tactile Switch

Product Number	Heights	Mobility	Positioning Column	Operating Direction	Stroke	Operating Life(5mA 12C DC)	Initial Contact Resistance
RHTGYS0304-2.0-160-T-2.0H	L=2.0	1.57N	Yes	Top Push	0.20m	100000Cycles	100mΩ Max
RHTGYS0304-2.0-260-T-2.0H	L=2.0	2.55N	Yes	Top Push	0.20m	50000Cycles	100mΩ Max
RHTGYS0304-2.0-160-T-2.5H	L=2.5	1.57N	Yes	Top Push	0.20m	100000Cycles	100mΩ Max
RHTGYS0304-2.0-260-T-2.5H	L=2.5	2.55N	Yes	Top Push	0.20m	50000Cycles	100mΩ Max

NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

Tactile Switch SMD

0~3

3~18

18~50

50~120

CHK'D BY FENG

THIRD ANGLE PROJECTION



RHTGYS0304

±0.12

±0.15

±0.3

±0.5

APPR BY ZHAN

1

2

3

4

5

6

7

8

9